




SK513

COM Express® Type 6 Carrier Board
+ MXM Graphics System+PCIe/104

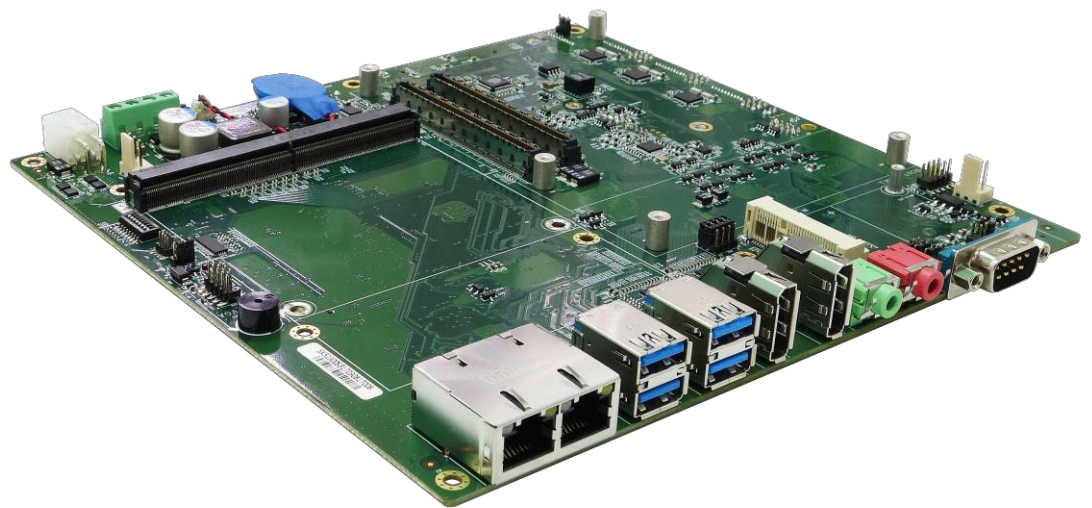

User's Manual
Revision Date: Aug. 23. 2024



Safety information

Electrical safety

- To prevent electrical shock hazard, disconnect the power cable from the electrical outlet before relocating the system.
- When adding or removing devices to or from the system, ensure that the power cables for the devices are unplugged before the signal cables are connected. If possible, disconnect all power cables from the existing system before you add a device.
- Before connecting or removing signal cables from the motherboard, ensure that all power cables are unplugged.
- Seek professional assistance before using an adapter or extension cord. These devices could interrupt the grounding circuit.
- Make sure that your power supply is set to the correct voltage in your area.
- If you are not sure about the voltage of the electrical outlet you are using, contact your local power company.
- If the power supply is broken, do not try to fix it by yourself. Contact a qualified service technician or your local distributor.

Operation safety

- Before installing the motherboard and adding devices on it, carefully read all the manuals that came with the package.
- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- To avoid short circuits, keep paper clips, screws, and staples away from connectors, slots, sockets and circuitry.
- Avoid dust, humidity, and temperature extremes. Do not place the product in any area where it may become wet.
- Place the product on a stable surface.
- If you encounter any technical problems with the product, contact your local distributor

Statement

- All rights reserved. No part of this publication may be reproduced in any form or by any means, without prior written permission from the publisher.
- All trademarks are the properties of the respective owners.
- All product specifications are subject to change without prior notice

Revision History

Revision	Date (yyyy/mm/dd)	Changes
V1.0	2019/10/1	Initial release
V2.0	2024/08/23	Add 11 th , 13 th , 14 th CPU in list; Remove Type-7 list

Packing list

- COM Express + MXM carrier board
- Accessories
 - If any of the above items is damaged or missing, please contact your local distributor.

Ordering information

Model Number	Description
SK513	COM Express Type 6 carrier board w/PCIe104, MXM, 9~36V DC-in, operating Temp -40 to 85°C

Table Contents

Safety information	2
Electrical safety.....	2
Operation safety.....	2
Statement	2
Revision History.....	3
Packing list.....	3
Ordering information	3
Table Contents.....	4
Chapter 1: Product Introduction	6
1.1 Key Features	6
1.2 Block Diagram	8
1.3 Connector & pin header	9
Chapter 2: Jumpers and Connectors.....	11
2.1 Connector & Pin Definitions	11
COM1.....	11
DP1, DP2: DisplayPort.....	11
CN25: LAN1, LAN2	11
JP7: COM1 Pin9 select	12
JP8, JP9: COM1 Mode select	12
JP10: Enable COM1 RS-485/422 Receiver Termination	12
J23: Front Panel	13
CN1, CN2: COM Express Connector.....	13
CN15: M_PCIE2 (mini PCIe Slot).....	13
JP6: miniPCIe1 function select.....	13
J20: MXM_VGA	13
JP30: MXM Type select.....	14
MXM1: MXM socket.....	14
CN21: MXM DC-IN	14
JP28: Clear CMOS	14
DCIN: System DC-IN	14
J18: MXM_DP(C/D).....	15
J17: MXM_DP(A/B)	15
J10: LVDS	15
J15: USB2.0 (USB4/USB5).....	16

J8: VGA.....	16
J9: DIO.....	16
J11: LVDS Backlight	16
JP23: LVDS Backlight Power select.....	17
JP24: LVDS Signal Power select.....	17
J4: LPC.....	17
J5: COM2 / J6: COM3 / J13: COM4.....	18
JP12, JP13: COM2 Mode select	18
JP14: Enable COM2 RS-485/422 Receiver Termination	18
JP11: COM2 Pin9 select.....	18
JP15: COM3 Pin9 select.....	19
CN14: M_PCIE1 (mini PCIe Slot).....	20

Chapter 1: Product Introduction

1.1 Key Features

System

COM Express CPU Options (Type 6)	Intel® Core™ Ultra 7 Processor 165H, 20-45W, Meteor Lake 14 th Gen, 14+2C, Freq. 0.9/1.4 Max. 5.0 GHz, 24MB cache Intel® Core™ Ultra 7 Processor 155H, 20-45W, Meteor Lake 14 th Gen, 14+2C, Freq. 0.9/1.4 Max. 4.8 GHz, 24MB cache Intel® Core™ Ultra 5 Processor 125H, 20-45W, Meteor Lake 14 th Gen, 12+2C, Freq. 0.7/1.2 Max. 4.5 GHz, 18MB cache Intel® Core™ i7-13800HRE 45W Raptor Lake 13 th Gen, 14C , Freq. 2.5 /5.0 GHz, 24MB cache Intel® Core™ i7-13800HE 45W Raptor Lake 13 th Gen, 14C , Freq. 2.5 /5.0 GHz, 24MB cache Intel® Core™ i7-11850HE 45W Tiger Lake 11 th Gen, 8C, 2.6 /4.7 GHz, 24MB cache Intel® Xeon® W-11865MLE 45W Tiger Lake 11 th Gen, 8C, 1.5 /4.5 GHz, 12MB cache Intel® Xeon® E-2276ME 45W Coffee Lake 9 th Gen, 6C, 2.8 /4.5 GHz, 12MB cache Intel® Xeon® E-2276ML 25W Coffee Lake 9 th Gen, 6C, 2.0 / 4.2 GHz,12MB cache Intel® Core™ i7-9850HE 45W Coffee Lake 9 th Gen, 6C, 2.7 / 4.4 GHz, 9MB cache Intel® Core™ i7-9850HL 25W Coffee Lake 9 th Gen, 6C, 1.9 / 4.1 GHz, 9MB cache
GPU Module Options	NVIDIA® Ampere RTX A2000, 80W, 8GB GDDR6, 2,560 CUDA Cores NVIDIA® Ampere RTX A4500, 80W/130W, 16GB GDDR6, 5,888 CUDA Cores NVIDIA® Ada Lovelace RTX 3500 Ada, 115W, 12GB GDDR6, 5,120 CUDA Cores NVIDIA® Ada Lovelace RTX 5000 Ada, 115W, 16GB GDDR6, 9,728 CUDA Cores
Compatibility	COM Express® Type 6

Display

Display Port	2x DisplayPort outputs from COM Express®, 4 x outputs from GPU, 6 total
VGA	1x output from COM Express®, 1x output from GPU
LVDS	1x Dual channel 18/24bit LVDS
DVI	1x output from COM Express

Expansion

MiniPCIe Expansion	2x Full-size Mini PCIe (1 with mSATA supported)
M.2 Expansion	1x 2280 M-key (SATA only)
SATA	2x SATAIII
PCIe/104	4 x PCIe x 1 1 x PCIe x 4 5 x USB 2.0 1 x LPC 1 x SPI

Ethernet

Gigabit Ethernet	2x 10/100/1000mb Ethernet Ports(One from CPU module)
------------------	--

I/O

USB	4x USB 3.0 + 2x USB 2.0
-----	-------------------------

COM Port	4x RS232/422/485 (function select by jumper)
Audio	1x Line-out, 1x MIC-IN
SATA Power	2x SATA Power
SATAIII	2x SATAIII
DI/DO	1x DI/DO (4 in / 4 out)
FAN Power	1x CPU FAN
	1x MXM FAN
Battery	1x Battery Header

Power System

Input Power_SYS	9~36V (4P Terminal Block)
Input Power_MXM	12V (ATX 4P)
Power Consumption	Varies per COM Express/ MXM with different CPU and GPU models
RTC Battery	3V CR2032

Mechanical and Environmental

Dimension	185mm x 190mm
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	10% to 90%, non-condensing

Standard Compliance



Standard Compliance	CE / FCC
---------------------	----------

OS

OS Support	Windows®10 64bit, Linux(Support by request)
------------	---

*All specifications and photos are subject to change without notice.

1.3 Connector & pin header

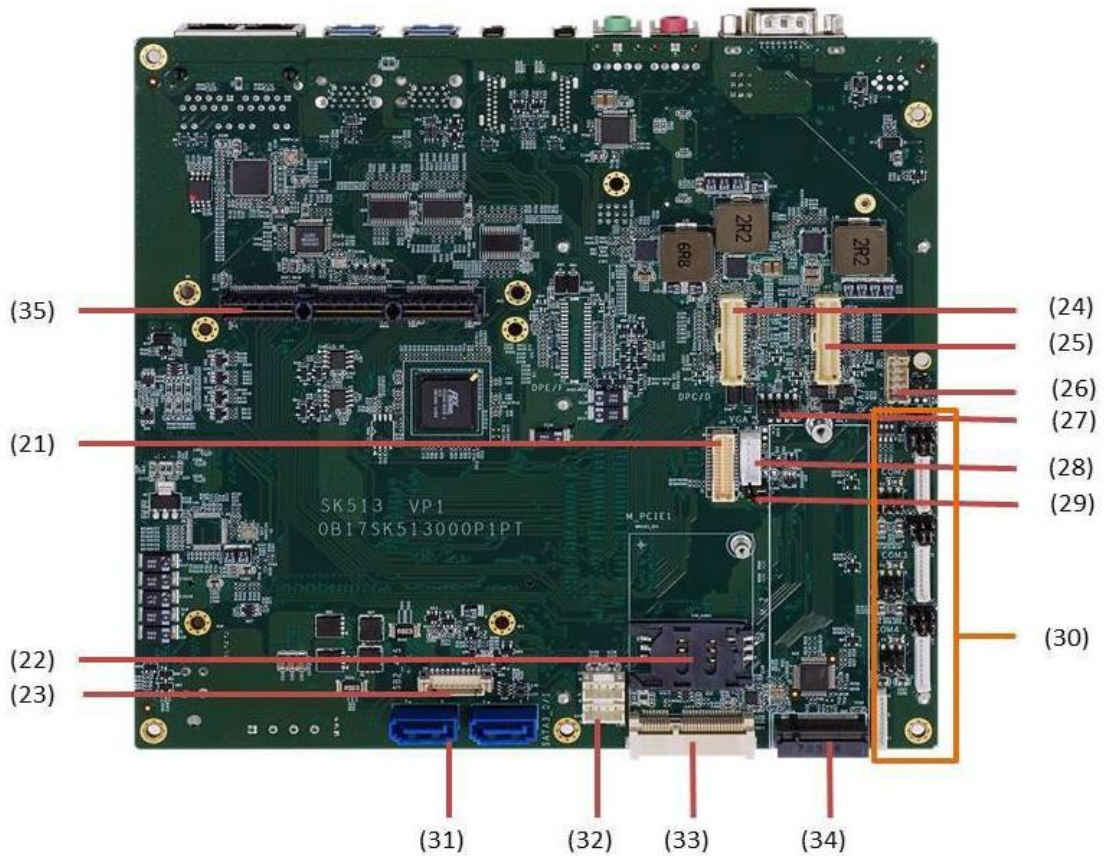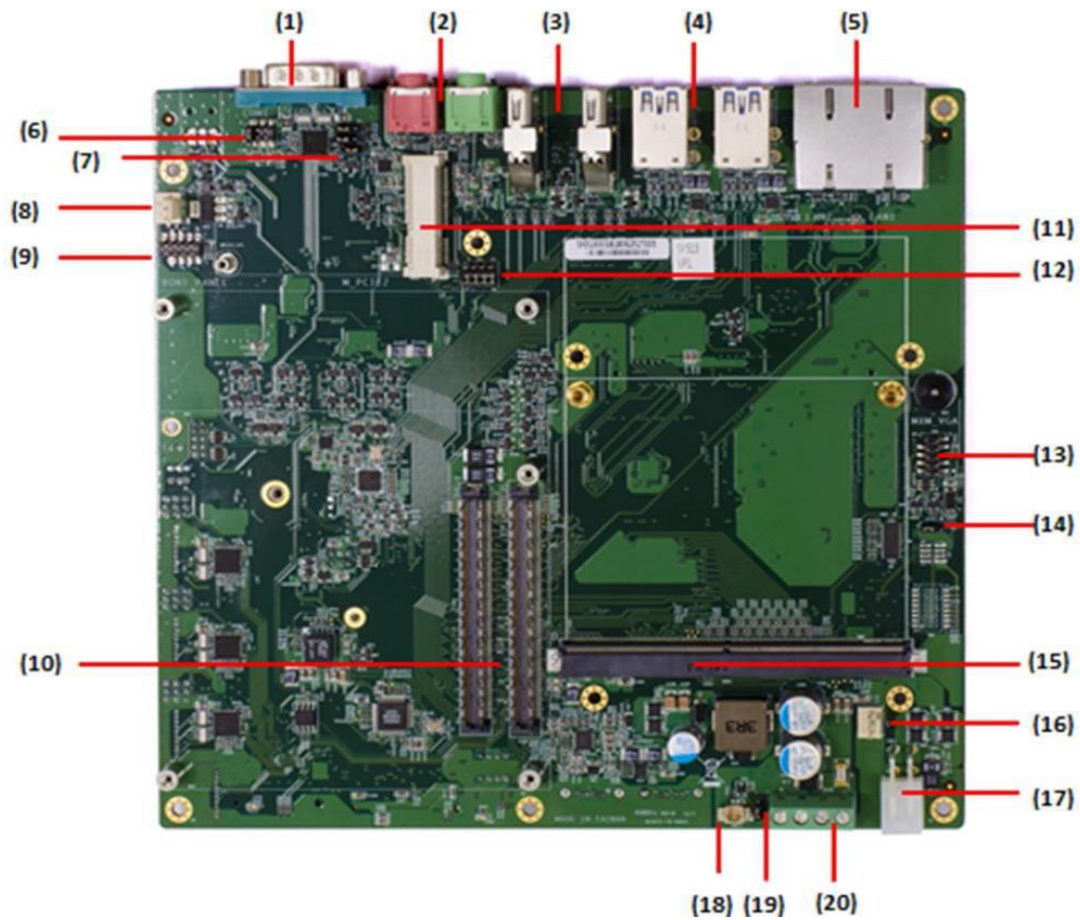

1	COM1
2	CN12 (MIC-In), CN13 (LINE-Out)
3	DP1, DP2
4	CN17, CN23 (USB3.0)
5	CN25 (LAN1, LAN2)
6	JP7
7	JP8,JP9,JP10
8	J22
9	J23
10	CN1, CN2 (COM Express connector)
11	CN15 (miniPCle)
12	JP6
13	J20
14	JP30
15	MXM1
16	J25
17	CN21
18	JBAT1
19	JP28
20	DCIN
21	J10
22	SIM_CARD1
23	J15
24	J18 (DPC/D)
25	J17 (DPA/B)
26	J9
27	J8
28	J11
29	JP23,JP24
30	See page 8~9
31	CN26, CN27
32	J2, J3
33	CN14
34	CN3
35	STACKPC1

Chapter 2: Jumpers and Connectors

2.1 Connector & Pin Definitions


COM1

Pin	RS-232	RS-422	RS-485
1	DCD-	TX-	NC
2	RXD	TX+	NC
3	TXD	RX+	DATA+
4	DTR-	RX-	DATA-
5	GND	GND	GND
6	DSR-	NC	NC
7	RTS-	NC	NC
8	CTS-	NC	NC
9	RI	NC	NC

CN12, CN13

	Definition
CN12	MIC-IN
CN13	LINE-OUT

DP1, DP2: DisplayPort



CN17, CN23: 4 x USB 3.0 Port




CN25: LAN1, LAN2



JP7: COM1 Pin9 select

Pin	Function
(1-2) Closed	RI
(3-4) Closed	+5V
(5-6) Closed	+12V

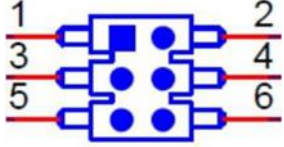


JP8, JP9: COM1 Mode select

JP8	JP9	Mode
(2-3)	(2-3)	RS232
(1-2)	(2-3)	RS485 Half Duplex
(1-2)	(1-2)	RS485/422 Full Duplex


JP10: Enable COM1 RS-485/422 Receiver Termination

Pin	Function
(1-2) Closed	High
(2-3) Closed	Low

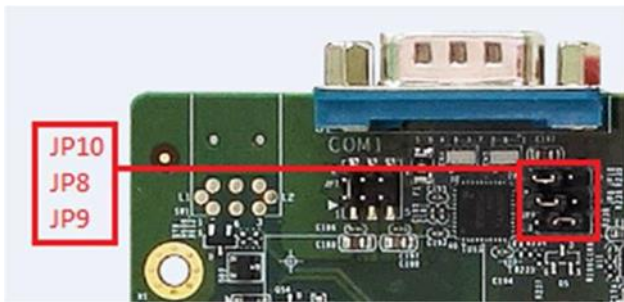


J22: CPU FAN Connector

Pin	Function
1	GND
2	CPUFANOUT
3	+12V




J25: MXM FAN connector

Pin	Function
1	GND
2	
3	+12V



J23: Front Panel


Pin	Function
1	HDLED+
2	PWLED+
3	HDLED-
4	GND
5	GND
6	PWRBTN#
7	RESET
8	GND
9	NC



CN1,CN2: COM Express Connector


Support COM Express Basic Size Type 6 Module

CN15: M_PCIE2 (mini PCIe Slot)

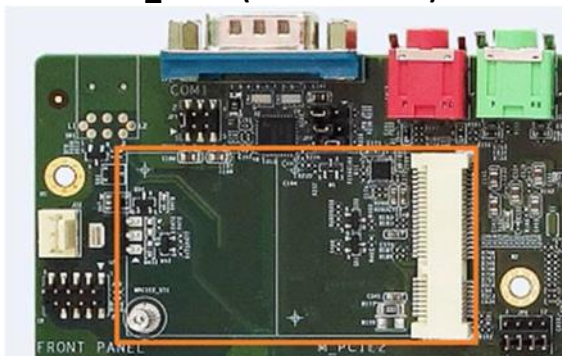


JP6: miniPCIe1 function select

PClex1	SATA
(1-2) Closed	(2-3) Closed



J20: MXM_VGA

Pin	Function
1	MVGA_VS
2	MVGA_SCL
3	MVGA_HS
4	MVGA_SDA
5	GND
6	MVGA_VCC
7	MVGA_R
8	MVGA_B
9	MVGA_G

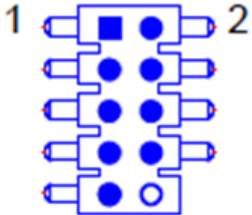

JP30: MXM Type select


Pin	Function
(1-2) Closed	MXM v3.0
(2-3) Closed	MXM v3.1

MXM1: MXM socket




CN21: MXM DC-IN

Pin	Definition
1	12V
2	12V
3	GND
4	GND

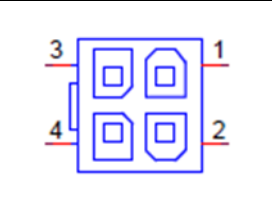A schematic diagram of the CN21 MXM DC-IN connector. It shows a 4-pin connector with pins numbered 1 through 4. Pin 1 is at the top right, pin 2 at the bottom right, pin 3 at the top left, and pin 4 at the bottom left. The diagram shows the internal connections between the pins and the connector housing.


JP28: Clear CMOS

Pin	Function
(1-2) Closed	Normal(default)
(3-4) Closed	Clear CMOS

A schematic diagram of the JP28 Clear CMOS jumper. It shows a 4-pin connector with pins numbered 1 through 4. Pin 1 is at the top, pin 2 in the middle, and pin 3 at the bottom. The diagram shows the internal connections between the pins and the connector housing.


DCIN: System DC-IN

Pin	Definition
1	12V
2	12V
3	GND
4	GND

A photograph of the DCIN System DC-IN connector. It is a green plastic component with four pins. The top two pins are labeled '12V' and the bottom two are labeled 'GND'.


J18: MXM_DP(C/D)

Pin	Function	Pin	Function	Pin	Function	Pin	Function
1	GND	11	DPC_TN1	21	DPC_TP3	31	DPC_AUXP_CLK
2	GND	12	DPD_TN1	22	DPD_TP3	32	DPD_AUXP_CLK
3	DPC_TP0	13	GND	23	DPC_TN3	33	DPC_AUXN_DAT
4	DPD_TP0	14	GND	24	DPD_TN3	34	DPD_AUXN_DAT
5	DPC_TN0	15	DPC_TP2	25	GND	35	GND
6	DPD_TN0	16	DPD_TP2	26	GND	36	GND
7	GND	17	DPC_TN2	27	DPC_AUX_SEL	37	DPC_DET
8	GND	18	DPD_TN2	28	DPD_AUX_SEL	38	DPD_DET
9	DPC_TP1	19	GND	29	GND	39	DPC_PWR
10	DPD_TP1	20	GND	30	GND	40	DPD_PWR




J17: MXM_DP(A/B)

Pin	Function	Pin	Function	Pin	Function	Pin	Function
1	GND	11	DPA_TN1	21	DPA_TP3	31	DPA_AUXP_CLK
2	GND	12	DPB_TN1	22	DPB_TP3	32	DPB_AUXP_CLK
3	DPA_TP0	13	GND	23	DPA_TN3	33	DPA_AUXN_DAT
4	DPB_TP0	14	GND	24	DPB_TN3	34	DPB_AUXN_DAT
5	DPA_TN0	15	DPA_TP2	25	GND	35	GND
6	DPB_TN0	16	DPB_TP2	26	GND	36	GND
7	GND	17	DPA_TN2	27	DPA_AUX_SEL	37	DPA_DET
8	GND	18	DPB_TN2	28	DPB_AUX_SEL	38	DPB_DET
9	DPA_TP1	19	GND	29	GND	39	DPA_PWR
10	DPB_TP1	20	GND	30	GND	40	DPB_PWR




J10: LVDS

Pin	Function	Pin	Function	Pin	Function
1	LVDSB_CLK+	11	LVDSB2+	21	LVDSB0-
2	GND	12	LVDSA_CLK-	22	LVDSA1-
3	LVDSB_CLK	13	LVDSB2-	23	GND
4	LVDSA3+	14	GND	24	LVDSA0+
5	GND	15	LVDSB1+	25	LVDS_SCLK
6	LVDSA3-	16	LVDSA2+	26	LVDSA0-
7	LVDSB3+	17	LVDSB1-	27	LVDS_SDATA
8	GND	18	LVDSA2-	28	GND
9	LVDSB3-	19	LVDSB0+	29	LVDS_VCC
10	LVDSA_CLK+	20	LVDSA1+	30	LVDS_VCC



SIM_CARD1

Pin	Function	Pin	Function
1	UIM_PWR	4	GND
2	UIM_RESET	5	UIM_VPP
3	UIM_CLK_R	6	UIM_DATA




J15: USB2.0 (USB4/USB5)

Pin	Function	Pin	Function
1	5V_USB4	6	5V_USB5
2	USB2_DN4	7	USB2_DN5
3	USB2_DP4	8	USB2_DP5
4	GND	9	GND
5	GND	10	GND




J8: VGA

Pin	Function
1	VGA_VS
2	VGA_SCL
3	VGA_HS
4	VGA_SDA
5	GND
6	VGA_VCC
7	VGA_R
8	VGA_B
9	VGA_G

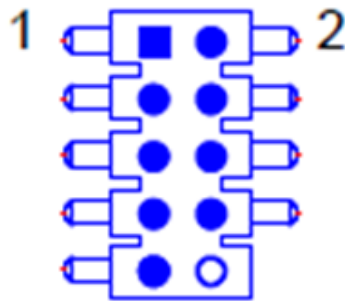

J9: DIO

Pin	Function
1	GPI0
2	GPO0
3	GPI1
4	GPO1
5	GPI2
6	GPO2
7	GPI3
8	GPO3
9	5V
10	GND

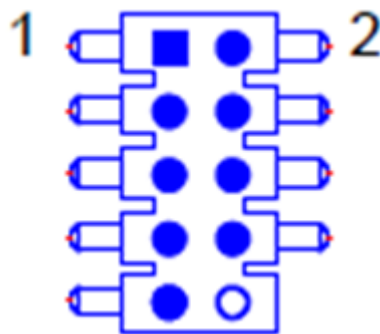

J11: LVDS Backlight

Pin	Function
1	BKL_VOL
2	LBKLT_CTRL
3	GND
4	GND
5	Backlight_EN




JP23: LVDS Backlight Power select

Pin	Function
(1-2) Closed	5V
(2-3) Closed	12V

JP24: LVDS Signal Power select


Pin	Function
(1-2) Closed	5V
(2-3) Closed	3.3V

No31: LPC/COM2/3/4

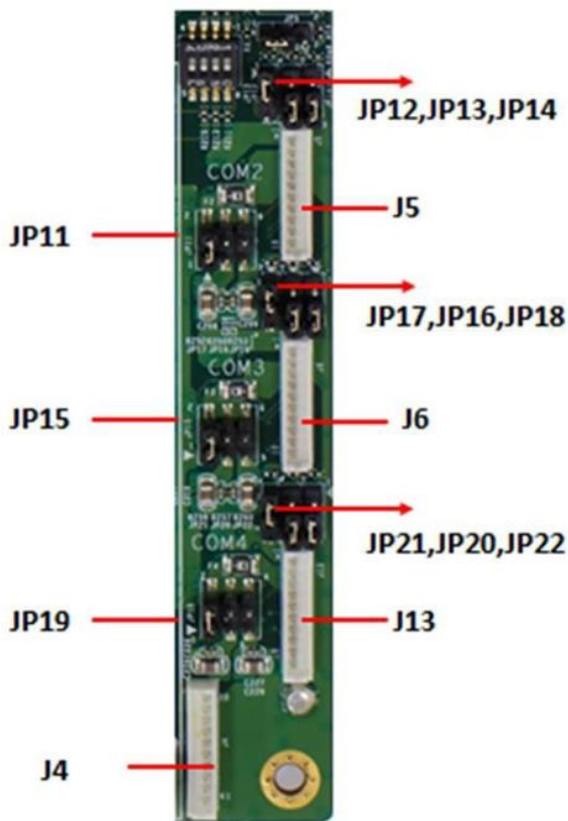


J4: LPC

Pin	Function
1	GND
2	GND
3	3V3
4	LPC_AD0
5	LPC_AD1
6	LPC_AD2
7	LPC_AD3
8	LPC_FRAME-
9	LPC_RST#
10	CLK_DBG

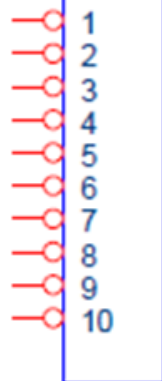

J5: COM2 / J6: COM3 / J13: COM4

Pin	RS232	RS422	RS485
1	5V	NC	NC
2	GND	GND	GND
3	COM_P9	NC	NC
4	DTR-	RX-	Data-
5	CTS-	NC	NC
6	TXD	RX+	Data+
7	RTS-	NC	NC
8	RXD	TX+	NC
9	DSR-	NC	NC
10	DCD-	TX-	NC

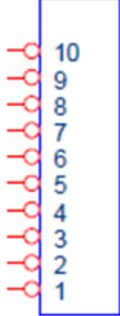

JP12, JP13: COM2 Mode select


JP8	JP9	Mode
(2-3)	(2-3)	RS232
(1-2)	(2-3)	RS485 Half Duplex
(1-2)	(1-2)	RS485/422 Full Duplex

JP14: Enable COM2 RS-485/422 Receiver Termination

Pin	Function
(1-2) Closed	High
(2-3) Closed	Low

JP11: COM2 Pin9 select

Pin	Function
(1-2) Closed	RI
(3-4) Closed	+5V
(5-6) Closed	+12V

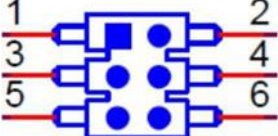

JP16, JP17: COM3 Mode select


JP8	JP9	Mode
(2-3)	(2-3)	RS232
(1-2)	(2-3)	RS485 Half Duplex
(1-2)	(1-2)	RS485/422 Full Duplex

JP18: Enable COM3 RS-485/422 Receiver Termination

Pin	Function
(1-2) Closed	High
(2-3) Closed	Low

JP15: COM3 Pin9 select

Pin	Function
(1-2) Closed	RI
(3-4) Closed	+5V
(5-6) Closed	+12V

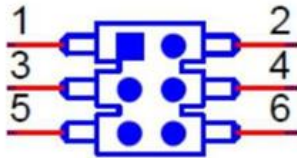

JP20, JP21: COM4 Mode select


JP8	JP9	Mode
(2-3)	(2-3)	RS232
(1-2)	(2-3)	RS485 Half Duplex
(1-2)	(1-2)	RS485/422 Full Duplex

JP22: Enable COM4 RS-485/422 Receiver Termination

Pin	Function
(1-2) Closed	High
(2-3) Closed	Low


JP19: COM4 Pin9 select

Pin	Function
(1-2) Closed	RI
(3-4) Closed	+5V
(5-6) Closed	+12V

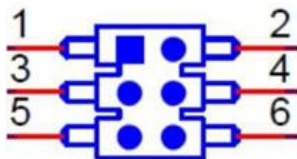


CN26, CN27: SATA

Pin	Function
1	GND
2	SATA_TP
3	SATA_TN
4	GND
5	SATA_RN
6	SATA_RP
7	GND



J2, J3: SATA Power

Pin	Definition
1	12V
2	GND
3	GND
4	5V







CN14: M_PCIE1 (mini PCIe Slot)





CN3: M.2 (2280 M key, SATA only)



CN36: StackPC1

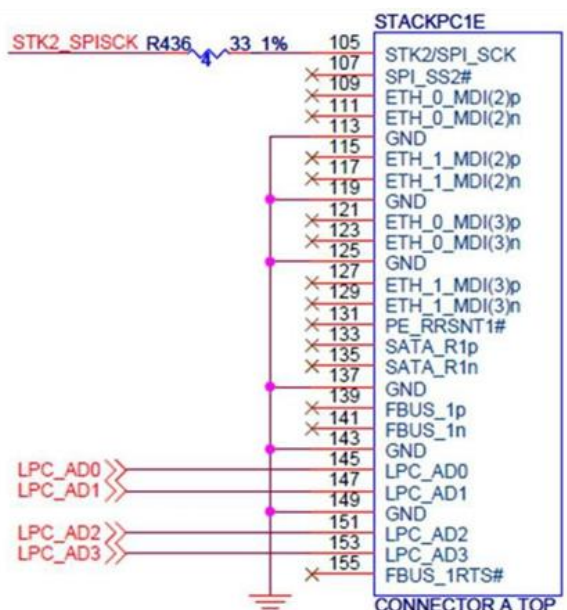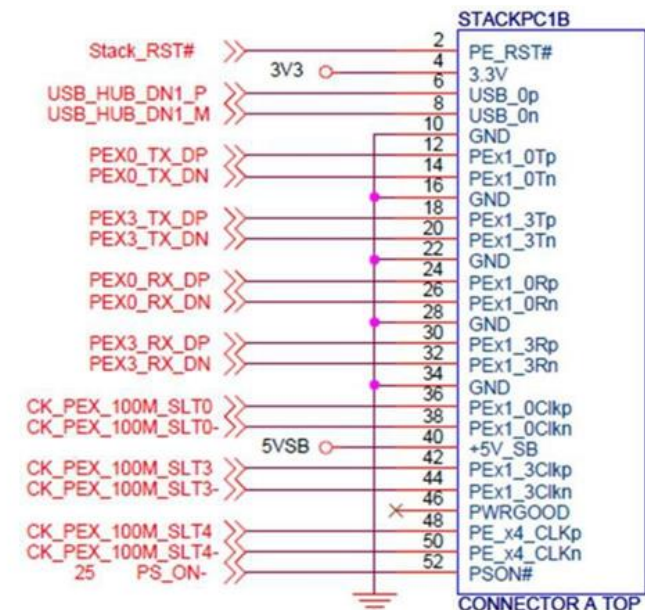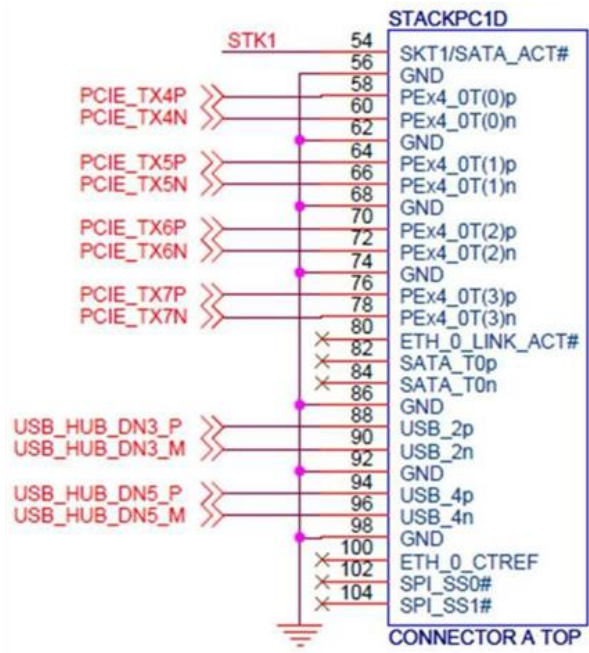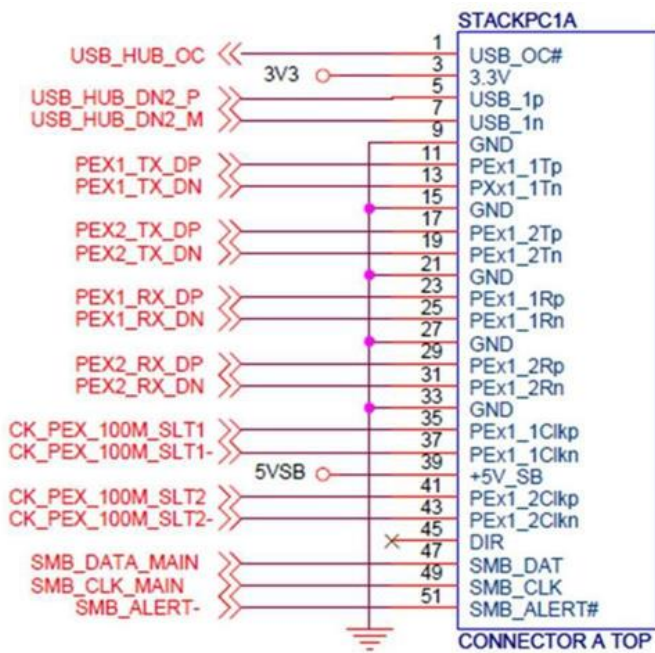

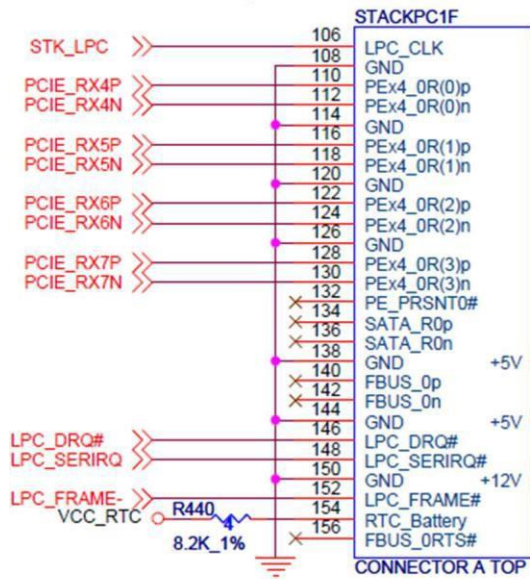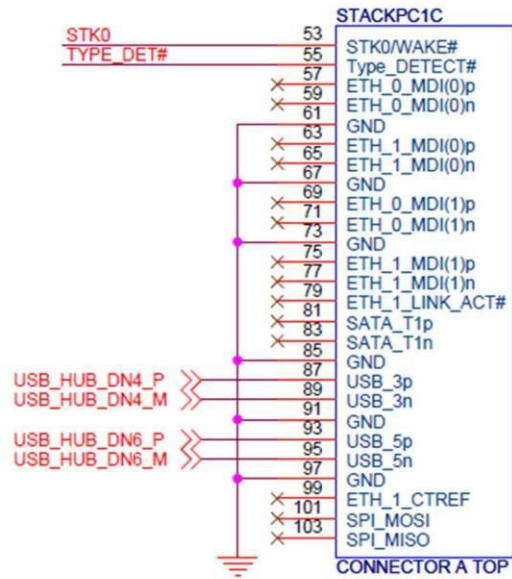

+3.3V = 3.6A
+5V_StackPC = 3.6A
+12V_StackPC = 8.4A

