



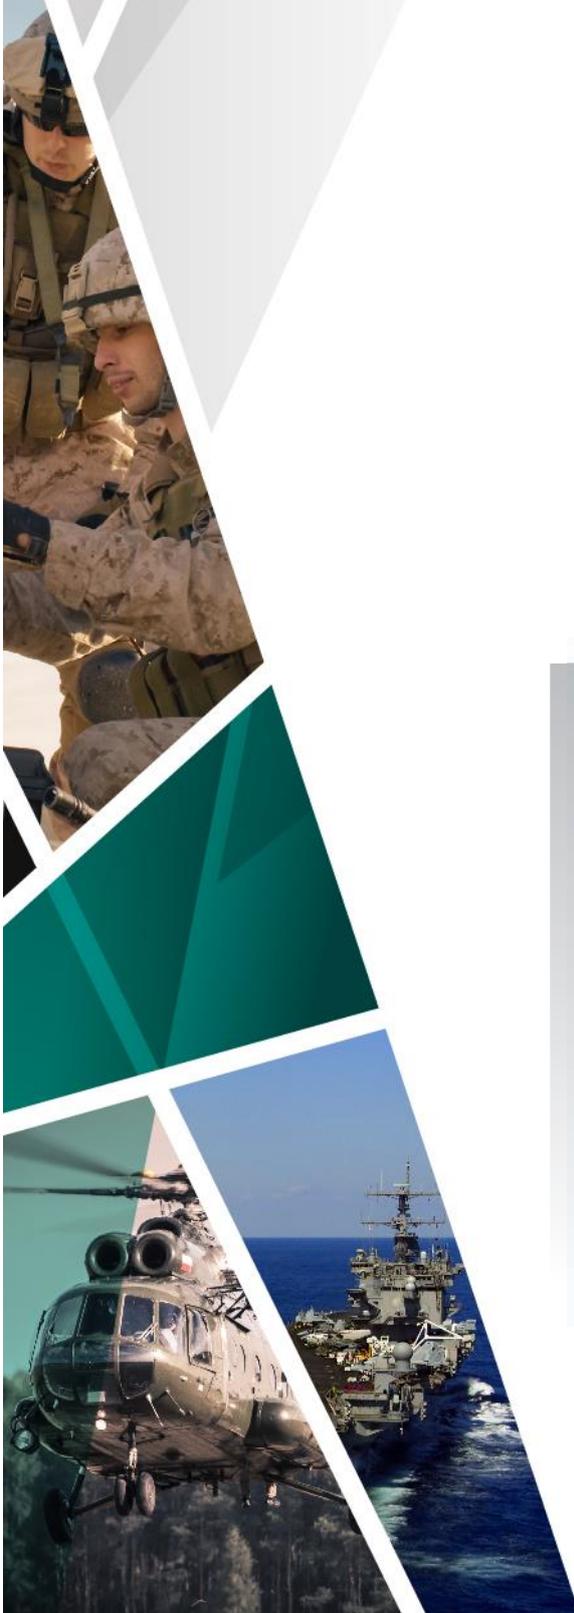

# INS8335A

Mini ITX Industrial Motherboard  
User's Manual

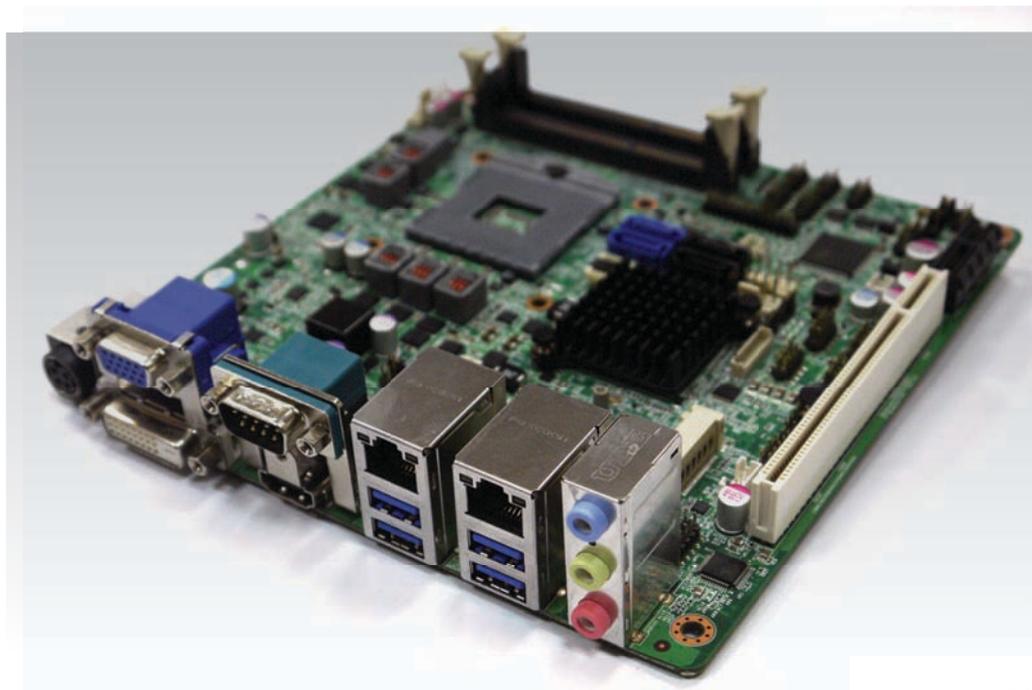

## Safety Information

### Electrical safety

- To prevent electrical shock hazard, disconnect the power cable from the electrical outlet before relocating the system.
- When adding or removing devices to or from the system, ensure that the power cables for the devices are unplugged before the signal cables are connected. If possible, disconnect all power cables from the existing system before you add a device.
- Before connecting or removing signal cables from the motherboard, ensure that all power cables are unplugged.
- Seek professional assistance before using an adapter or extension cord. These devices could interrupt the grounding circuit.
- Make sure that your power supply is set to the correct voltage in your area.
- If you are not sure about the voltage of the electrical outlet you are using, contact your local power company.
- If the power supply is broken, do not try to fix it by yourself. Contact a qualified service technician or your local distributor.

### Operation safety

- Before installing the motherboard and adding devices on it, carefully read all the manuals that came with the package.
- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- To avoid short circuits, keep paper clips, screws, and staples away from connectors, slots, sockets and circuitry.
- Avoid dust, humidity, and temperature extremes. Do not place the product in any area where it may become wet.
- Place the product on a stable surface.
- If you encounter any technical problems with the product, contact your local distributor

### Statement

- All rights reserved. No part of this publication may be reproduced in any form or by any means, without prior written permission from the publisher.
- All trademarks are the properties of the respective owners.
- All product specifications are subject to change without prior notice

## Revision History

Revision	Date (dd.mm.yyyy)	Changes
Version 1.0	10.07.2012	Initial release
Version 1.1	28.09.2012	JP3 jumper setting
Version 1.2	05.12.2012	JP4 jumper default setting

## Packing list

- INS8335A Mini-ITX Industrial MB
- I/O Shield
- 1 x SATA Cable
- 2 x COM ports cable w/bracket
- 1 x USB cable
- CD (driver + user's manual)



---

If any of the above items is damaged or missing, please contact your local distributor.

---


# Table of Contents

<b>Safety Information</b> .....	<b>1</b>
Electrical safety.....	1
Operation safety.....	1
Statement.....	1
<b>Revision History</b> .....	<b>2</b>
<b>Packing list</b> .....	<b>2</b>
<b>Chapter 1: Product Information</b> .....	<b>5</b>
1.1 Block Diagram.....	5
1.2 Key Features.....	6
1.3 Board Placement.....	8
1.4 Mechanical Drawings.....	9
<b>Chapter 2: Jumpers and Connectors</b> .....	<b>10</b>
<b>Chapter 3: AMI BIOS UTILITY</b> .....	<b>22</b>
3.1 Starting.....	22
3.2 Navigation Keys.....	22
3.3 Main Menu.....	23
3.4 Advanced Menu.....	24
3.4.1 ACPI Settings.....	25
3.4.2 CPU Configuration.....	26
3.4.3 SATA Configuration.....	28
3.4.4 Thermal Configuration.....	29
3.4.4.1 Platform thermal configuration.....	29
3.4.5 Intel Rapid Start Technology.....	30
3.4.6 Intel TXT(LT) Configuration.....	31
3.4.7 PCH-FW Configuration.....	31
3.4.8 Intel Anti-Theft Technology Configuration.....	32
3.4.9 AMT Configuration.....	33
3.4.10 USB Configuration.....	34
3.4.11 F81866 Super IO Configuration.....	35
3.4.12 F81866 H/W Monitor.....	36
3.4.13 Serial Port Console Redirection.....	37
3.4.14 CPU PPM Configuration.....	38
3.5 Chipset.....	39
3.5.1 PCH-IO Configuration.....	39
3.5.1.1 USB Configuration.....	41
3.5.1.2 PCH Azalia Configuration.....	42
3.5.2 System Agent (SA) Configuration.....	43
3.5.2.1 Graphics Configuration.....	44
3.5.2.2 Memory Configuration.....	45
3.6 Boot Setting.....	46
3.7 Security.....	47

3.8 Save and exit..... 48

# Chapter 1: Product Information

## 1.1 Block Diagram

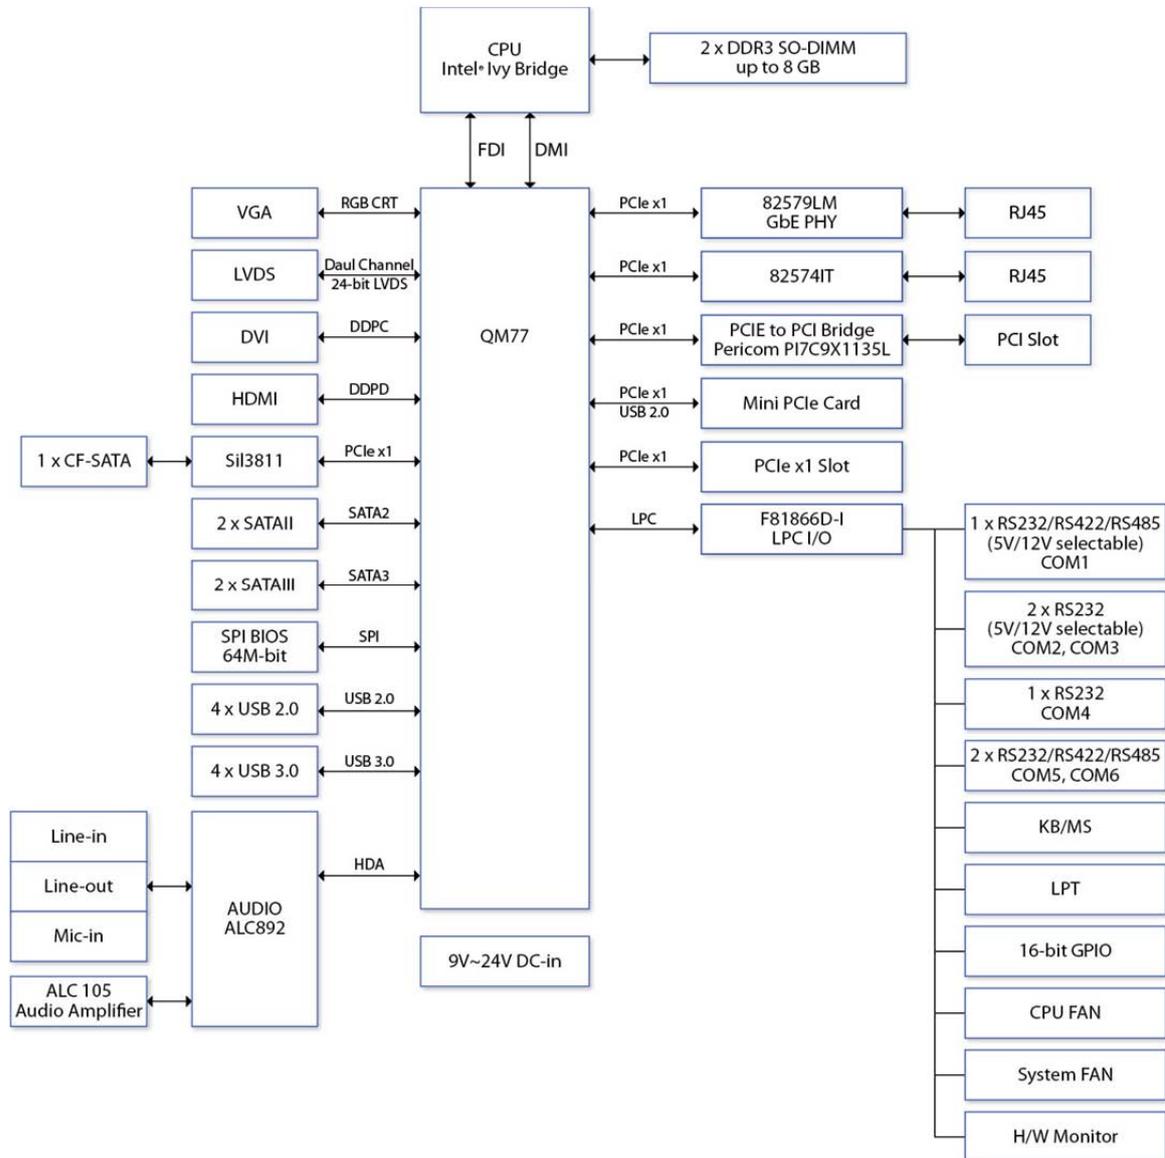


## 1.2 Key Features

Processor & System	
CPU Type	Intel® 22nm Ivy Bridge Processor (Mobile) socket (rPGA988)
Chipset	Intel® QM77
Memory Type	2 x 204-pin SO-DIMM support up to 8GB dual channel DDR3 1333/1600, Non-ECC
BIOS	AMI® UEFI BIOS
Supoer I/O	F81866D-I
Watchdog	1-255 sec. or 1-255 min. software programmable, can generate system reset
Expansion Slot	1 x PCIe x1 1 x Mini PCIe 1 x PCI
Display	
Chipset	Integrated GFX in Ivy Bridge processor
Onboard VGA	Yes, Max: SXGA 2048 x1536 @ 60 Hz
LVDS	Dual channel 24-bit LVDS, Max. 1920 x 1200
Onboard DVI-D	Yes, (Max. resolution 1920 x 1200)
Onboard HDMI	Yes, (Max. resolution 1920 x 1200)
Independent Display Capability	VGA, LVDS, DVI, HDMI
Audio	
Codec	Realtek ALC892 High Definition Audio Codec
Ethernet	
Chipset	Intel® 82579LM & 82574IT GbE
WOL	Yes
Boot from LAN	Yes for PXE
Rear I/O	
VGA	1
DVI-D	1
HDMI	1
Ethernet	2 x RJ45
USB	4 x USB 3.0
Audio	Mic-in, Line-in, Line-out
COM Port	1x RS232/422/485 with 5V/12V selectable
DC Jack	1
Internal I/O	
SATA	2 x SATAIII (6 Gb/s) 2 x SATAII (3 Gb/s)
CF-SATA	1
LVDS	30-pin connector
USB	8 x USB •4 x USB 3.0 ports on rear I/O •4 x USB 2.0 ports by pin header


COM	6 x COM ports <ul style="list-style-type: none"> <li>•COM1 port RS232/422/485 with 5V/12V selectable on rear I/O</li> <li>•COM2~3 ports RS232 with 5V/12V selectable by pin header</li> <li>•COM4 port supports RS232 by pin header</li> <li>•COM5~6 ports RS232/422/485 by pin header</li> </ul>
DIO	16-bit (4 in/4 out)
PS/2	1 x pin-header for PS/2 keyboard and mouse
Fan	1 x CPU fan, 1 x System fan
Parallel Port	2 x 13-pin header
<b>Mechanical and Environment</b>	
Form Factor	Mini-ITX
Power Type	9V to 24V DC-in
Dimension	170 x 170 mm (6.7" x 6.7")
Operating Temp.	-20 to 70°C
Relative Humidity	10% to 90%, non-condensing

**\*All specifications and photos are subject to change without notice.**

### 1.3 Board Placement

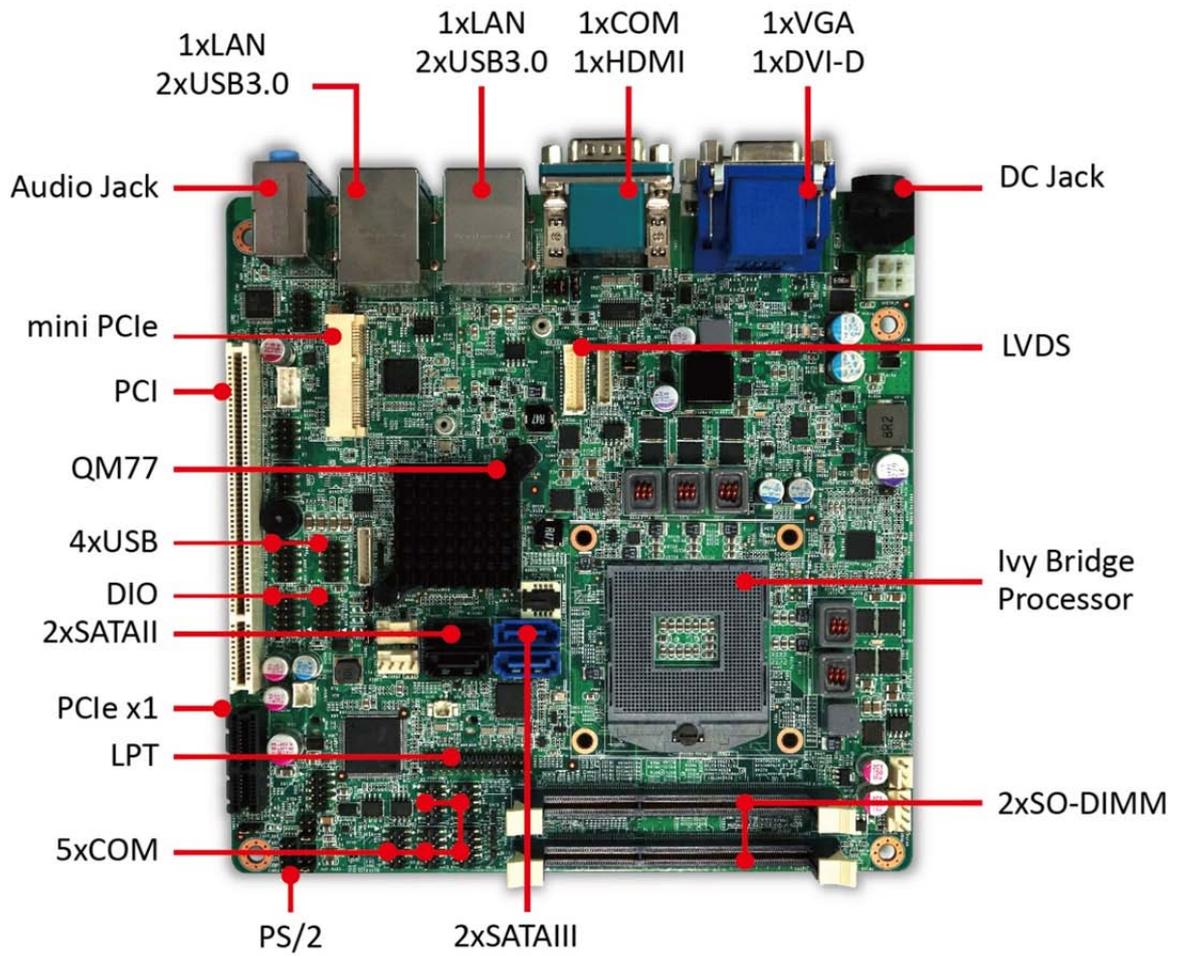


## 1.4 Mechanical Drawings

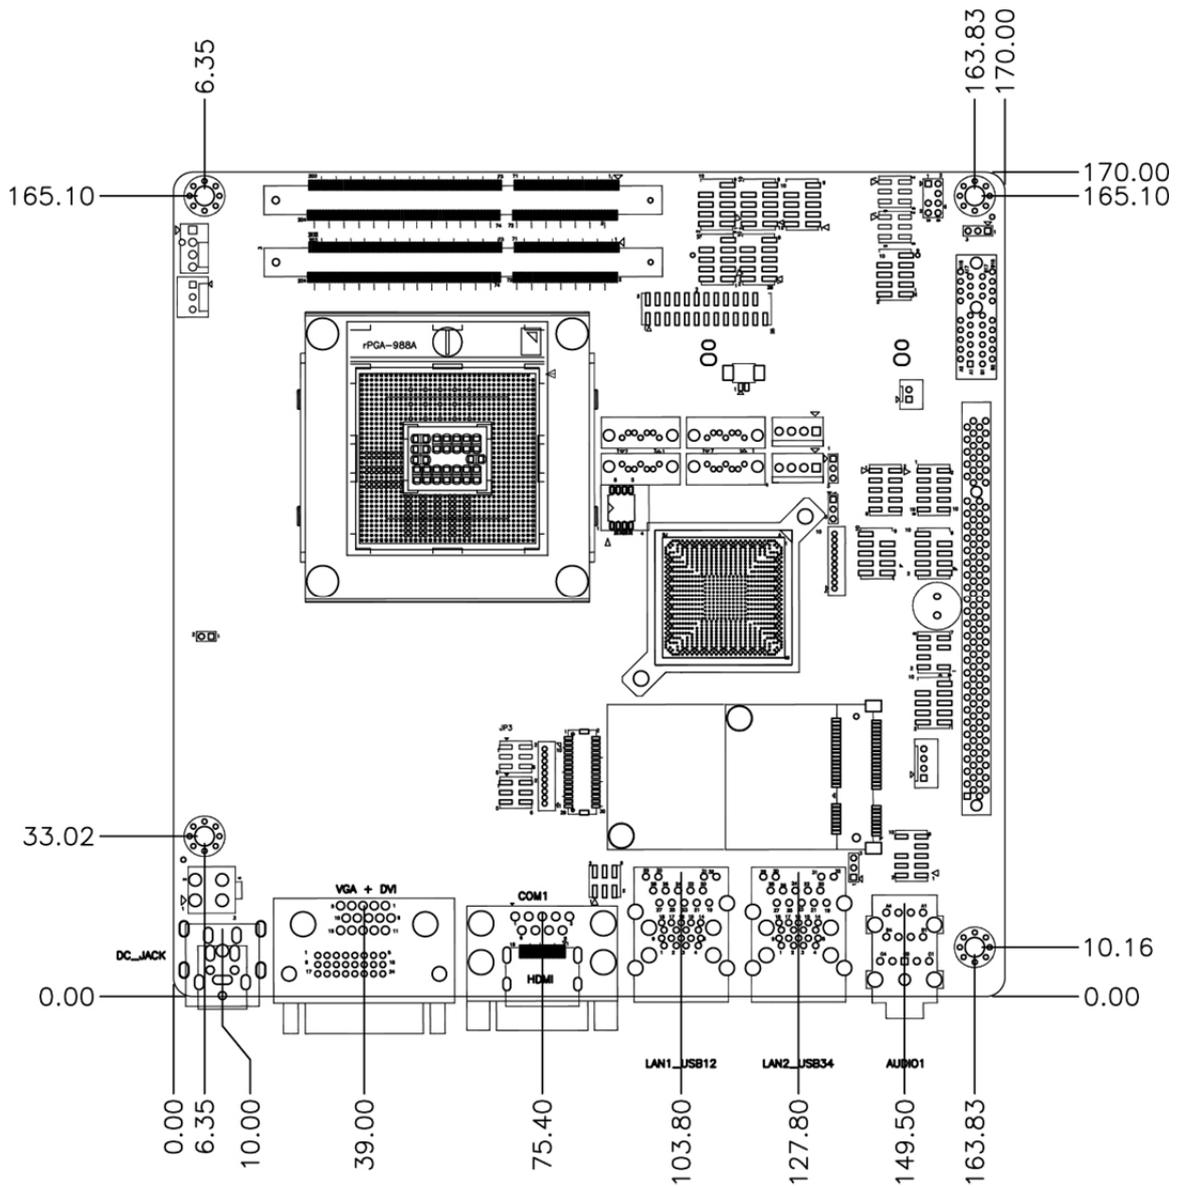

## Chapter 2: Jumpers and Connectors


### CPUFAN: 4 pin FAN connector

Pin	Definition
1	GND
2	CPUFAN_VCC
3	CPUFAN_TAC
4	NC (Option for 4 pin PWM FAN control)




### SYSFAN: 3 pin FAN connector

Pin	Definition
1	GND
2	SYSFAN_VCC
3	SYSFAN_TAC



### LPT1: LPT port pin header

Pin	Definition	Pin	Definition
1	STB#	2	AFD#
3	SPD0	4	ERROR#
5	SPD1	6	PINIT#
7	SPD2	8	SLIN#
9	SPD3	10	GND
11	SPD4	12	GND
13	SPD5	14	GND
15	SPD6	16	GND
17	SPD7	18	GND
19	ACK#	20	GND
21	BUSY	22	GND
23	PE	24	GND
25	SLCT	26	

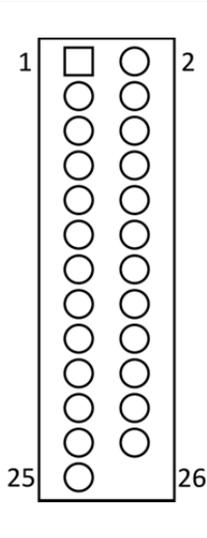

**LVDS:** LVDS connector

Pin	Definition	Pin	Definition
1	LVDS_BCLK	2	GND
3	LVDS_BCLK#	4	LVDS_A3
5	GND	6	LVDS_A3#
7	LVDS_B3	8	GND
9	LVDS_B3#	10	LVDS_ACLK
11	LVDS_B2	12	LVDS_ACLK #
13	LVDS_B2#	14	GND
15	LVDS_B1	16	LVDS_A2
17	LVDS_B1#	18	LVDS_A2#
19	LVDS_B0	20	LVDS_A1
21	LVDS_B0#	22	LVDS_A1#
23	GND	24	LVDS_A0
25	DDC CLOCK	26	LVDS_A0#
27	DDC DATA	28	GND
29	LVDS_VDD (Define by JP4)	30	LVDS_VDD (Define by JP4)


**JP4:** LVDS\_VDD power select

Jumper	Function description	Setting
1-2	+5V	1 <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 2 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 5 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 6
3-4	+3.3V	1 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 2 <input type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 5 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 6
5-6	+12V	1 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 2 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 5 <input type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> 6



\*Default setting is 3-4\*

**JBKL1:** Inverter connector

Pin	Definition
1	Backlight power (+12V)
2	Backlight power (+12V)
3	Backlight power (+12V)
4	+5V
5	+5V
6	GND
7	GND
8	Backlight enable (Voltage level Select by JP3)
9	Backlight brightness control (Voltage level Select by JP3)
10	GND





**JP3:** Backlight control voltage level select

Jumper	Function description	Setting
5-3	5V	
1-3	3.3V	

\*Default setting is 1-3\*


**JP3:** Backlight ADJ mode select

Jumper	Function description	Setting
2-4	PWM mode	
6-4	Voltage mode	

\*Default setting is 2-4\*


**KBMS1:** PS2 Key Board / Mouse

Pin	Definition	Pin	Definition
1	+5VAUX	2	GND
3		4	GND
5	MS DATA	6	KB DATA
7	MS CLOCK	8	KB CLOCK



**FP1: Front Panel 1**


Pin	Definition	Pin	Definition
1	HDLED+	2	PLED+
3	HDD_ACT-	4	PLED-
5	GND	6	PWRBTN-
7	SYSRST-	8	GND
9	NC		



**F\_USB1: USB2.0 port 0,1 pin header**

**F\_USB2: USB2.0 port 2,3 pin header**


Pin	Definition	Pin	Definition
1	+5VDUAL	2	+5VDUAL
3	D-	4	D-
5	D+	6	D+
7	GND	8	GND
9		10	GND



**LAN1\_USB12: USB3.0 port 0,1 and LAN connector 1**


**LAN2\_USB34: USB3.0 port 3,4 and LAN connector 2**

Upper USB		Lower USB		LAN	
Pin	Definition	Pin	Definition	Pin	Definition
1	+5VDUAL	1	+5VDUAL	1	D0+
2	D-	2	D-	2	D0-
3	D+	3	D+	3	D1+
4	GND	4	GND	4	D1-
5	StdA_SSTX-	5	StdA_SSTX-	5	D2+
6	StdA_SSTX+	6	StdA_SSTX+	6	D2-
7	GND_DRIAN	7	GND_DRIAN	7	D3+
8	StdA_SSRX-	8	StdA_SSRX-	8	D3-
9	StdA_SSRX-	9	StdA_SSRX-		

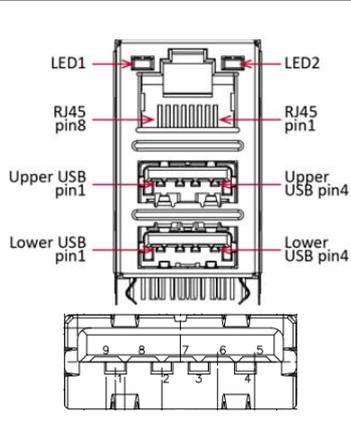


**DIO1: Digital input/output pin header**

Pin	Definition	Pin	Definition
1	SBDO0	2	SBDI0
3	SBDO1	4	SBDI1
5	SBDO2	6	SBDI2
7	SBDO3	8	SBDI3
9	+5V	10	GND




**DIO2: Digital input/output pin header**

Pin	Definition	Pin	Definition
1	SBDO4	2	SBDI4
3	SBDO5	4	SBDI5
5	SBDO6	6	SBDI6
7	SBDO7	8	SBDI7
9	+5V	10	GND




**AUDIO1: LINE-OUT/LINE-IN/MIC-IN**

Pin	Definition
A1	LINE-IN_L
A2	LINE-IN_JD
A3	AGND
A4	LINE-IN_R
B1	LINE-OUT_L
B2	LINE-OUT_JD
B3	AGND
B4	LINE-OUT_R
C1	MIC_L
C2	MIC_JD
C3	AGND
C4	MIC_R
C0	AGND




**AFP1: LINE-OUT/MIC-IN**

Pin	Definition	Pin	Definition
1	MIC2_L	2	AGND
3	MIC2_R	4	A_GPIO
5	LIN2_R	6	SRTN1
7	SENSE_B	8	
9	LIN2_L	10	SRTN2




**AMP1: 4ohm 3Watt Amplifier output pin header**

Pin	Definition
1	SP_OUTL-
2	SP_OUTL+
3	SP_OUTR+
4	SP_OUTR-




**DVI-D: DVI-D**

Pin	Definition	Pin	Definition
1	TMDS2-	13	NC
2	TMDS2+	14	+5V
3	GND	15	GND
4	NC	16	HOTPLUG_DETECT
5	NC	17	TMDS0-
6	DDC_CLK	18	TMDS0+
7	DDC_DATA	19	GND
8	NC	20	NC
9	TMDS1-	21	NC
10	TMDS1+	22	GND
11	GND	23	TMDSCLK+
12	NC	24	TMDSCLK-

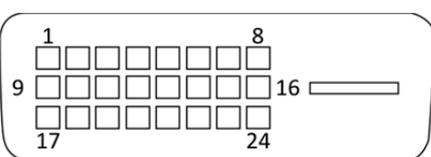


**VGA: VGA**

Pin	Definition	Pin	Definition
1	RED	9	+5V
2	GREEN	10	GND
3	BLUE	11	NC
4	NC	12	DDC DATA
5	GND	13	HSYNC
6	GND	14	VSYNC
7	GND	15	DDC CLOCK
8	GND		

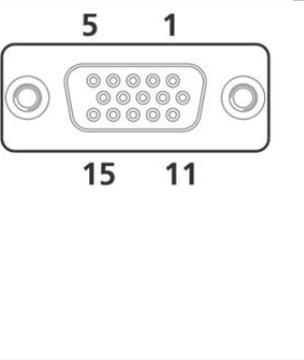


**HDMI: HDMI**

Pin	Definition	Pin	Definition
1	HDMI_2P	11	GND
2	GND	12	HDMI_CLKN
3	HDMI_2N	13	NC
4	HDMI_1P	14	NC
5	GND	15	DDC CLOCK
6	HDMI_1N	16	DDC DATA
7	HDMI_0P	17	GND
8	GND	18	+5V
9	HDMI_0N	19	HOTPLUG_DETECT
10	HDMI_CLKP		

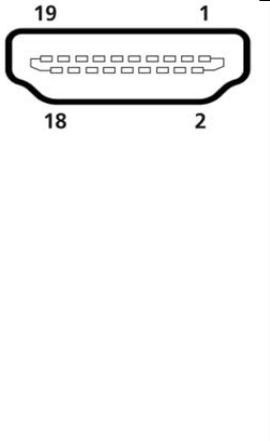


**COM1: RS232/422/485 with +12V/+5V selection**

Pin	RS-232	RS-422	Half Duplex RS-485
1	DCD-	TX-	DATA-
2	RXD	RX+	NA
3	TXD	TX+	DATA+
4	DTR-	RX-	NA
5	GND	GND	GND
6	DSR-	NA	NA
7	RTS-	NA	NA
8	CTS-	NA	NA
9	COM1P9SEL (Define by JP5)	COM1P9SEL (Define by JP5)	COM1P9SEL (Define by JP5)

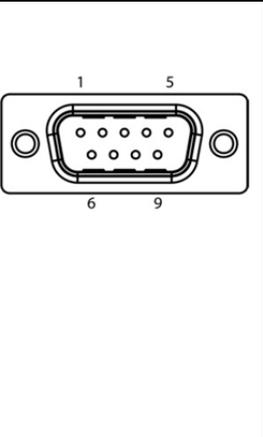


**COM2~COM3: RS232 with +12V/+5V selection**

Pin	Definition	Pin	Definition
1	DCD-	2	RXD
3	TXD	4	DTR-
5	GND	6	DSR-
7	RTS-	8	CTS-
9	COM2P9SEL/ COM3P9SEL (Define by JP6/7)		




**COM4: RS232**

Pin	Definition	Pin	Definition
1	DCD-	2	RXD
3	TXD	4	DTR-
5	GND	6	DSR-
7	RTS-	8	CTS-
9	RI-		




**COM5~COM6: RS232/422/485**

Pin	RS-232	RS-422	Half Duplex RS-485
1	DCD-	TX-	DATA-
2	RXD	RX+	NA
3	TXD	TX+	DATA+
4	DTR-	RX-	NA
5	GND	GND	GND
6	DSR-	NA	NA
7	RTS-	NA	NA
8	CTS-	NA	NA
9	RI-	RI-	RI-




**JP5: COM1 +12V/+5V selection**

Pin	Definition	Pin	Definition
1	COM1_RI-	2	COM1P9SEL
3	+5V	4	COM1P9SEL
5	+12V	6	COM1P9SEL




**JP6: COM2 +12V/+5V selection**

Pin	Definition	Pin	Definition
1	COM2_RI-	2	COM2P9SEL
3	+5V	4	COM2P9SEL
5	+12V	6	COM2P9SEL




**JP7: COM3 +12V/+5V selection**

Pin	Definition	Pin	Definition
1	COM3_RI-	2	COM3P9SEL
3	+5V	4	COM3P9SEL
5	+12V	6	COM3P9SEL




**MINI\_MPCIE:** Mini PCIE connector

Pin	Definition	Pin	Definition
1	WAKE#	2	+3.3VAUX
3	NC	4	GND
5	NC	6	+1.5V
7	CLKREQ#	8	NC
9	GND	10	NC
11	REF CLK-	12	NC
13	REF CLK+	14	NC
15	GND	16	NC
17	NC	18	GND
19	NC	20	Wireless LAN Disable#
21	GND	22	RESET#
23	RXN	24	+3.3VAUX
25	RXP	26	GND
27	GND	28	+1.5V
29	GND	30	SMBUS CLOCK
31	TXN	32	SMBUS DATA
33	TXP	34	GND
35	GND	36	USB DATA-
37	GND	38	USB DATA+
39	+3.3VAUX	40	GND
41	+3.3VAUX	42	NC
43	GND	44	NC
45	Control Link CLOCK	46	NC
47	Control Link DATA	48	+1.5V
49	Control Link RESET#	50	GND
51	Blue Tooth Disable#	52	+3.3V VAUX

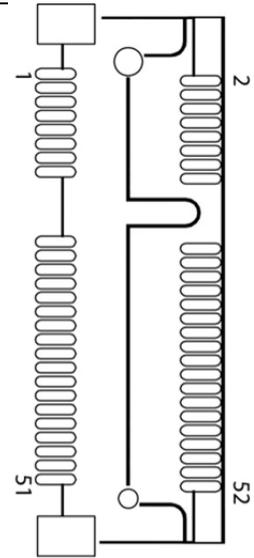


**DEBUG:** Debug card connector

Pin	Definition
1	33Mhz
2	RST#
3	LFRAME#
4	LAD3
5	LAD2
6	LAD1
7	LAD0
8	+3.3V
9	GND
10	GND

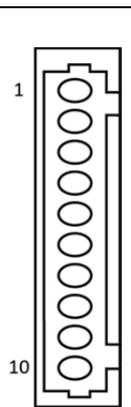


**SATA1, SATA2:** Serial ATA 3.0 Connector

Pin	Definition
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

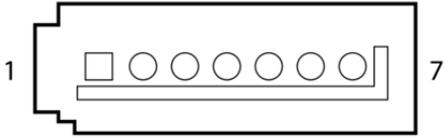


**SATA3, SATA4:** Serial ATA 2.0 Connector

Pin	Definition
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

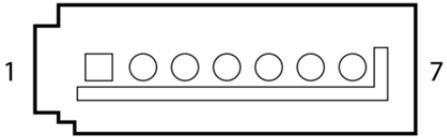

**SATAPO, SATAP1:** SATA Power Connector

Pin	Definition
1	+5V
2	GND
3	GND
4	+12V





**JCMOS1:** RTC Reset

Jumper	Function description	Setting
1-2	Normal Operation	
2-3	Clear CMOS	


\*Default setting is 1-2\*

**PSON1:** ATX/AT mode

Jumper	Function description	Setting
1-2	AT Mode	
2-3	ATX Mode	
*Default setting is 2-3*		


**JCASE1:** Case Open Warning

Pin	Definition
1	CASE OPEN#
2	GND




**PCIEX1\_1:** PCI Express X1

Pin	Side B Connector	Side A Connector
1	+12V	NC
2	+12V	+12V
3	+12V	+12V
4	GND	GND
5	SMBUS CLOCK	NC
6	SMBUS DATA	NC
7	GND	NC
8	+3.3V	NC
9	NC	+3.3V
10	+3.3VAUX	+3.3V
11	WAKE#	PCIE RESET
Mechanical Key		
12	NC	GND
13	GND	PCIE CLOCK+
14	PCIE TXP	PCIE CLOCK-
15	PCIE TXN	GND
16	GND	PCIE RXP
17	NC	PCIE RXN
18	GND	GND

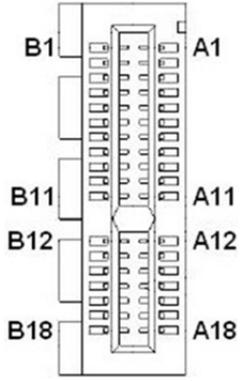


PCI: PCI

Pin	Definition	Pin	Definition	Pin	Definition	Pin	Definition
A1	Pull down 4.7K to GND	A32	AD16	B1	-12V	B32	AD17
A2	+12V	A33	+3.3	B2	GND	B33	CBE2#
A3	GND	A34	FRAME#	B3	GND	B34	GND
A4	GND	A35	GND	B4	NC	B35	IRDY#
A5	+5V	A36	TRDY#	B5	+5V	B36	+3.3V
A6	INTA#	A37	GND	B6	+5V	B37	DEVSEL#
A7	INTC#	A38	STOP#	B7	INTB#	B38	GND
A8	+5V	A39	+3.3V	B8	INTD#	B39	LOCK#
A9	GNT1#	A40	SMBUS CLOCK	B9	NC	B40	PERR#
A10	+5V	A41	SMBUS DATA	B10	REQ1#	B41	+3.3V
A11	NC	A42	GND	B11	NC	B42	SERR#
A12	GND	A43	PAR	B12	GND	B43	+3.3V
A13	GND	A44	AD15	B13	GND	B44	CBE1#
A14	+3.3VAUX	A45	+3.3V	B14	CLOCK1	B45	AD14
A15	RESET#	A46	AD13	B15	GND	B46	GND
A16	+5V	A47	AD11	B16	CLOCK0	B47	AD12
A17	GNT0#	A48	GND	B17	GND	B48	AD10
A18	GND	A49	AD9	B18	REQ0#	B49	GND
A19	PCI_PME#	A50	Keyway	B19	+5V	B50	Keyway
A20	AD30	A51	Keyway	B20	AD31	B51	Keyway
A21	+3.3V	A52	CBE0#	B21	AD29	B52	AD8
A22	AD28	A53	+3.3V	B22	GND	B53	AD7
A23	AD26	A54	AD6	B23	AD27	B54	+3.3V
A24	GND	A55	AD4	B24	AD25	B55	AD5
A25	AD24	A56	GND	B25	+3.3V	B56	AD3
A26	AD20	A57	AD2	B26	CBE3#	B57	GND
A27	+3.3V	A58	AD0	B27	AD23	B58	AD1
A28	AD22	A59	+5V	B28	GND	B59	+5V
A29	AD20	A60	REQ64#	B29	AD21	B60	ACK64#
A30	GND17	A61	+5V	B30	AD19	B61	+5V
A31	AD18	A62	+5V	B31	+3.3V	B62	+5V

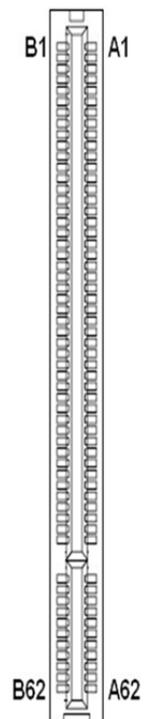


**CFD1:** CF card and CF-SATA card combo connector

Pin	Definition	Pin	Definition
1	GND	26	GND
2	D03	27	D11
3	D04	28	D12
4	D05	29	D13
5	D06	30	D14
6	D07	31	D15
7	-IDE_CS0	32	-IDE_CS1
8	GND	33	GND
9	GND	34	-IDE_DIOR
10	CF SATA TX+	35	-IDE_DIOW
11	CF SATA TX-	36	+5V
12	GND	37	IDE_INTRQ
13	+5V	38	+5V
14	GND	39	-CSEL
15	CF SATA RX-	40	-VS2
16	CF SATA RX+	41	-IDE_RESET
17	GND	42	IDE_IORDY
18	A2	43	-IDE_DMARQ
19	A1	44	-IDE_DMACK
20	A0	45	-CF_ACT
21	D00	46	-PDIAG
22	D01	47	D08
23	D02	48	D09
24	NC	49	D10
25	GND	50	GND

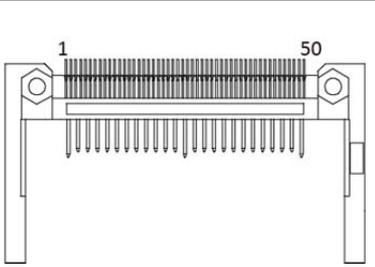


**ATX12V1:** Power input connector

Pin	Definition
1	GND
2	GND
3	+9V~24V
4	+9V~24V



**DC\_JACK:** DC input connector (+9V~24V)

Pin	Definition
1	+9V~24V
2	+9V~24V
3	GND
4	GND



## Chapter 3: AMI BIOS UTILITY

This chapter provides users with detailed descriptions on how to set up a basic system configuration through the AMI BIOS setup utility.

### 3.1 Starting

To enter the setup screens, perform the following steps:

- Turn on the computer and press the <Del> key immediately.
- After the <Del> key is pressed, the main BIOS setup menu displays. Other setup screens can be accessed from the main BIOS setup menu, such as the Chipset and Power menus.

### 3.2 Navigation Keys

The BIOS setup/utility uses a key-based navigation system called hot keys. Most of the BIOS setup utility hot keys can be used at any time during the setup navigation process. Some of the hot keys are <F1>, <F10>, <Enter>, <ESC>, and <Arrow> keys.




Some of the navigation keys may differ from one screen to another.

Left/Right	The Left and Right <Arrow> keys moves the cursor to select a menu.
Up/Down	The Up and Down <Arrow> keys moves the cursor to select a setup screen or sub-screen.
+– Plus/Minus	The Plus and Minus <Arrow> keys changes the field value of a particular setup setting.
Tab	The <Tab> key selects the setup fields.
F1	The <F1> key displays the General Help screen.
F10	The <F10> key saves any changes made and exits the BIOS setup utility.
Esc	The <Esc> key discards any changes made and exits the BIOS setup utility.
Enter	The <Enter> key displays a sub-screen or changes a selected or highlighted option in each menu.

### 3.3 Main Menu

The Main menu is the first screen that you will see when you enter the BIOS Setup Utility.

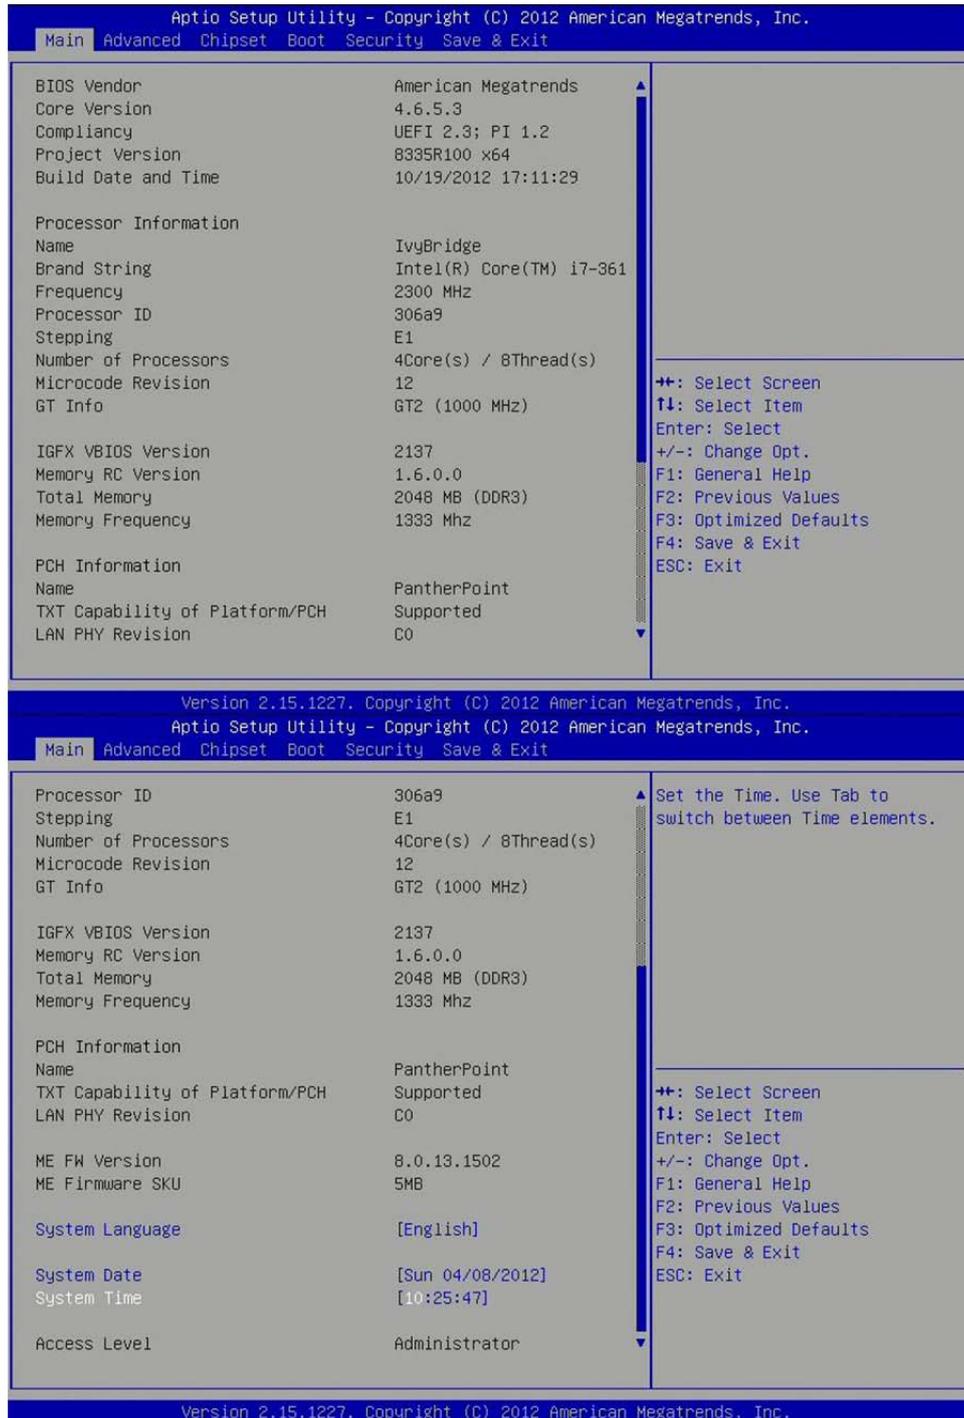

#### System Language

Use this function to select the system language.

### System Date

Use this function to change the system date.

Select System Date using the Up and Down <Arrow> keys. Enter the new values through the keyboard. Press the Left and Right <Arrow> keys to move between fields.

The date setting must be entered in MM/DD/YY format.

### System Time

Use this function to change the system time.

Select System Time using the Up and Down <Arrow> keys. Enter the new values through the keyboard. Press the Left and Right <Arrow> keys to move between fields.

The time setting is entered in HH:MM:SS format.

**Note:** The time is in 24-hour format. For example, 5:30 A.M. appears as 05:30:00, and 5:30 P.M. as 17:30:00.

### Access Level

Displays the access level of the current user in the BIOS.


## 3.4 Advanced Menu

The Advanced Menu allows you to configure your system for basic operation. Some entries are defaults required by the system board, while others, if enabled, will improve the performance of your system or let you set some features according to your preference. **Setting incorrect field values may cause the system to malfunction.**



### 3.4.1 ACPI Settings

#### System ACPI parameters

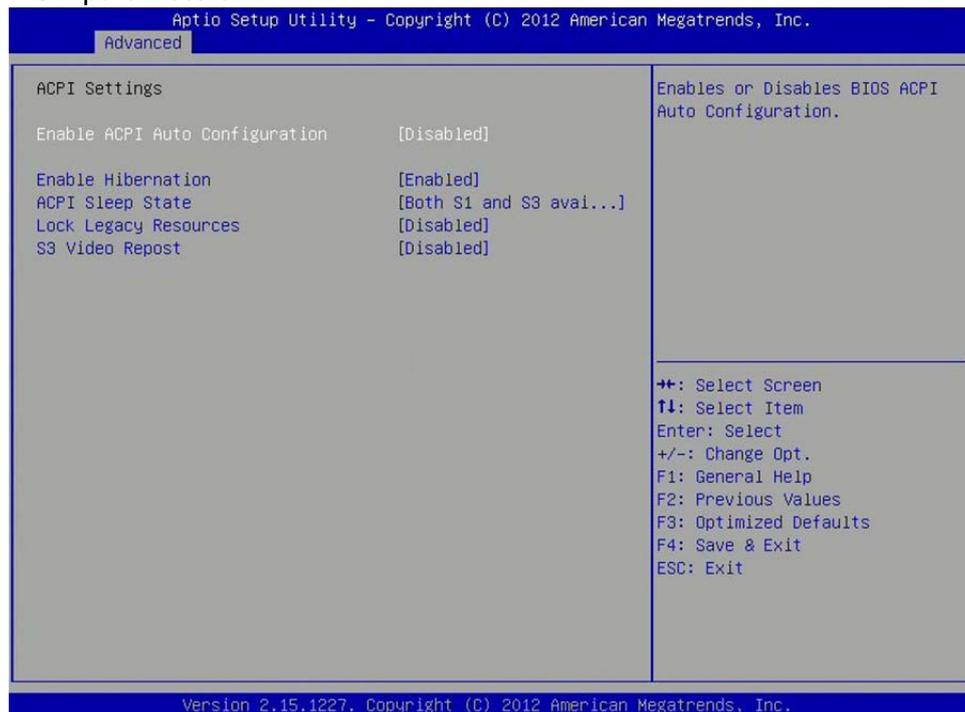

#### **Enable ACPI Auto Configuration**

Enables or disables BIOS ACPI auto configuration.

#### **Enable Hibernation**

Enables or disables system ability to hibernate (OS/S4 Sleep State). This option may not be effective with some OS.

#### **ACPI Sleep State**

Select the ACPI sleep state the system will enter when the suspend button is pressed.

#### **Lock Legacy Resources**

Enables or Disables System Lock of Legacy Resources.

#### **S3 Video Repost**

Enable or disable S3 Video Repost.

### 3.4.2 CPU Configuration

This section is used to configure the CPU.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.

Advanced

CPU Configuration		Enabled for Windows XP and Linux (OS optimized for Hyper-Threading Technology) and Disabled for other OS (OS not optimized for Hyper-Threading Technology). When Disabled only one thread per enabled core is enabled.
Intel(R) Core(TM) i7-3610QE CPU @ 2.30GHz		
CPU Signature	306a9	
Microcode Patch	12	
Max CPU Speed	2300 MHz	
Min CPU Speed	1200 MHz	
CPU Speed	2300 MHz	
Processor Cores	4	
Intel HT Technology	Supported	
Intel VT-x Technology	Supported	
Intel SMX Technology	Supported	
64-bit	Supported	
L1 Data Cache	32 kB x 4	
L1 Code Cache	32 kB x 4	
L2 Cache	256 kB x 4	
L3 Cache	6144 kB	
Hyper-threading	[Enabled]	
Active Processor Cores	[All]	
Limit CPUID Maximum	[Disabled]	
Execute Disable Bit	[Enabled]	
Intel Virtualization Technology	[Enabled]	
Hardware Prefetcher	[Enabled]	
		++: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit

Version 2.15.1227. Copyright (C) 2012 American Megatrends, Inc.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.

Advanced

Microcode Patch	12	The Maximum instantaneous current allow for Secondary Plane
Max CPU Speed	2300 MHz	
Min CPU Speed	1200 MHz	
CPU Speed	2300 MHz	
Processor Cores	4	
Intel HT Technology	Supported	
Intel VT-x Technology	Supported	
Intel SMX Technology	Supported	
64-bit	Supported	
L1 Data Cache	32 kB x 4	
L1 Code Cache	32 kB x 4	
L2 Cache	256 kB x 4	
L3 Cache	6144 kB	
Hyper-threading	[Enabled]	
Active Processor Cores	[All]	
Limit CPUID Maximum	[Disabled]	
Execute Disable Bit	[Enabled]	
Intel Virtualization Technology	[Enabled]	
Hardware Prefetcher	[Enabled]	
Adjacent Cache Line Prefetch	[Enabled]	
TCC Activation offset	10	
Primary Plane Current value	0	
Secondary Plane Current value	0	
		++: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit

Version 2.15.1227. Copyright (C) 2012 American Megatrends, Inc.

**Hyper-threading**

Enabled for Windows XP and Linux (OS optimized for Hyper-Threading Technology) and Disabled for other OS (OS not optimized for Hyper-Threading Technology). When disabled only one thread per enabled core is enabled.

**Active Processor Cores**

Number of cores to enable in each processor package.

**Limit CPUID Maximum**

Disabled for Windows XP.

**Execute Disable Bit**

XD can prevent certain classes of malicious buffer overflow attacks when combined with a supporting OS (Windows Server 2003 SP1, Windows XP SP2, SuSE Linux 9.2, RedHat Enterprise 3 Update 3.)

**Intel Virtualization Technology**

When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.

**Hardware Prefetcher**

To turn on/off the Mid Level Cache (L2) streamer prefetcher

**Adjacent Cache Line Prefetcher**

To turn on/off prefetching of adjacent cache lines

**TCC Activation Offset**

Offset from the factory TCC activation temperature

**Primary Plane Current Value**


The Maximum instantaneous current allow for primary plane

**Secondary Plane Current Value**

The Maximum instantaneous current allow for secondary plane

### 3.4.3 SATA Configuration

This section is used to configure the SATA drives.

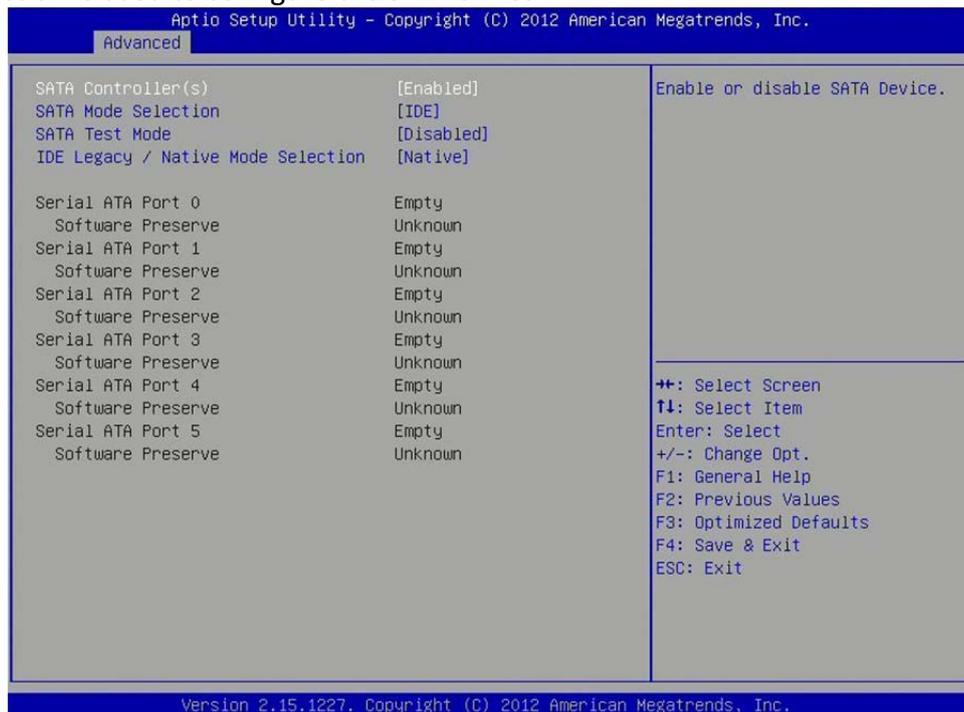

#### SATA Controller(s)

Enable or disable SATA device.

#### SATA Mode Selection

Determines how SATA controller(s) operate.

#### SATA Test Selection

Enable or disable Test Mode

#### IDE Legacy/Native Mode Selection


IDE Legacy/Native Mode Selection

#### Serial ATA Port 0 – 5


Displays information on the SATA devices detected

### 3.4.4 Thermal Configuration


#### Platform thermal configuration options

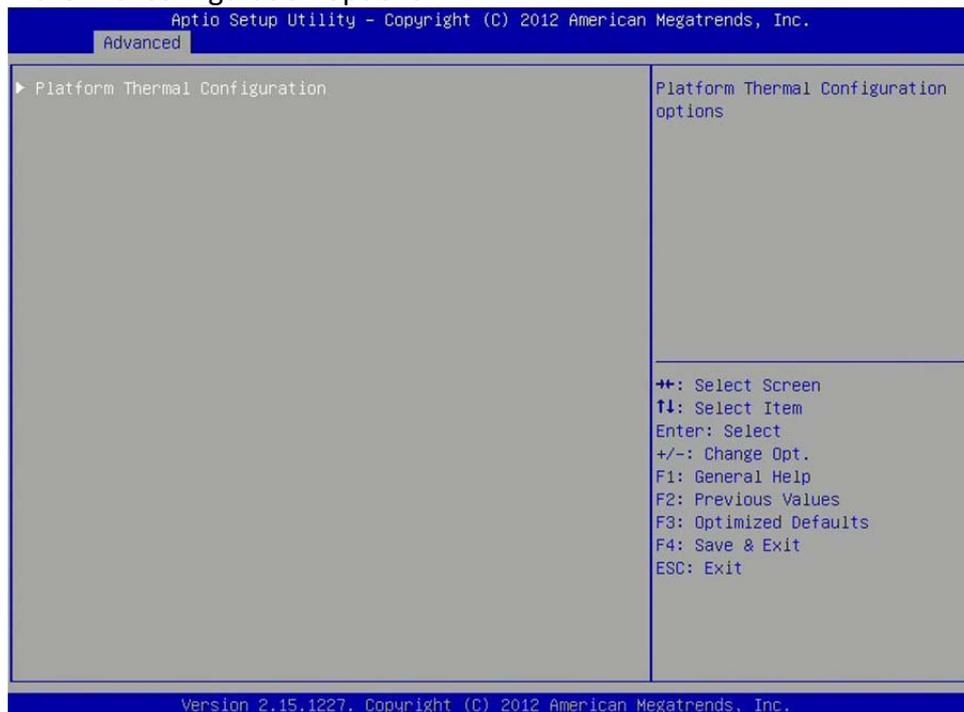

#### 3.4.4.1 Platform thermal configuration

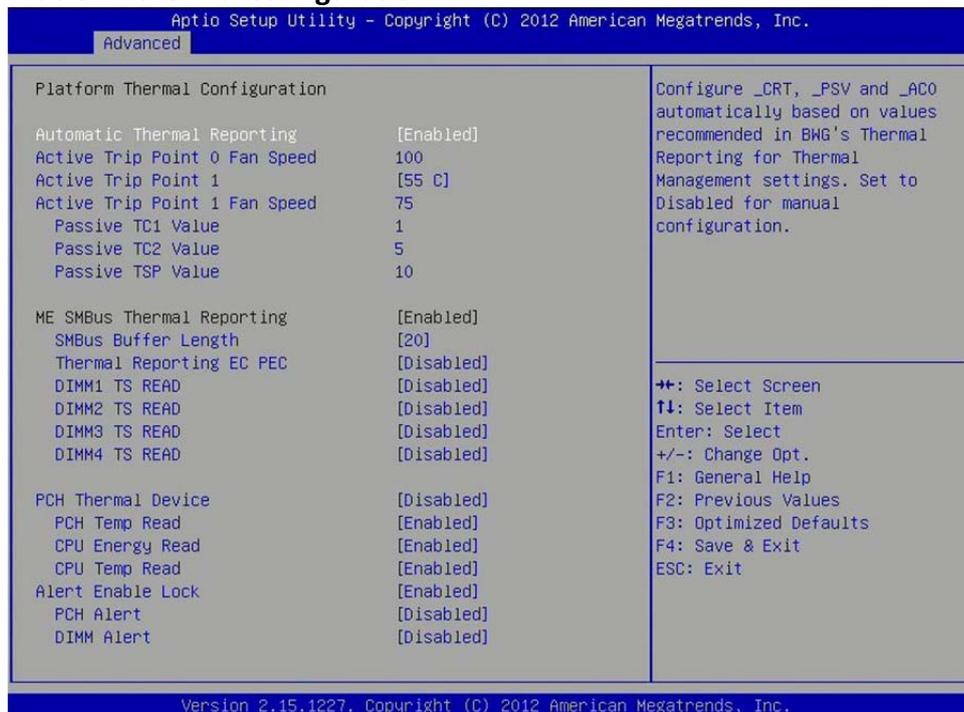


### 3.4.5 Intel Rapid Start Technology

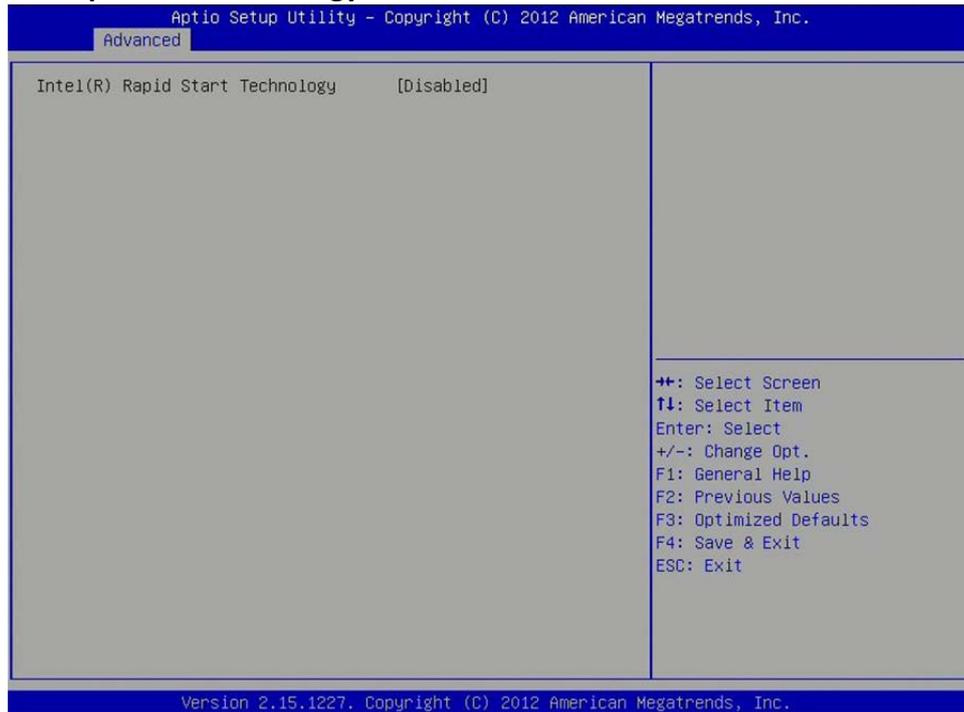

### 3.4.6 Intel TXT(LT) Configuration

#### Intel Trusted Execution Technology

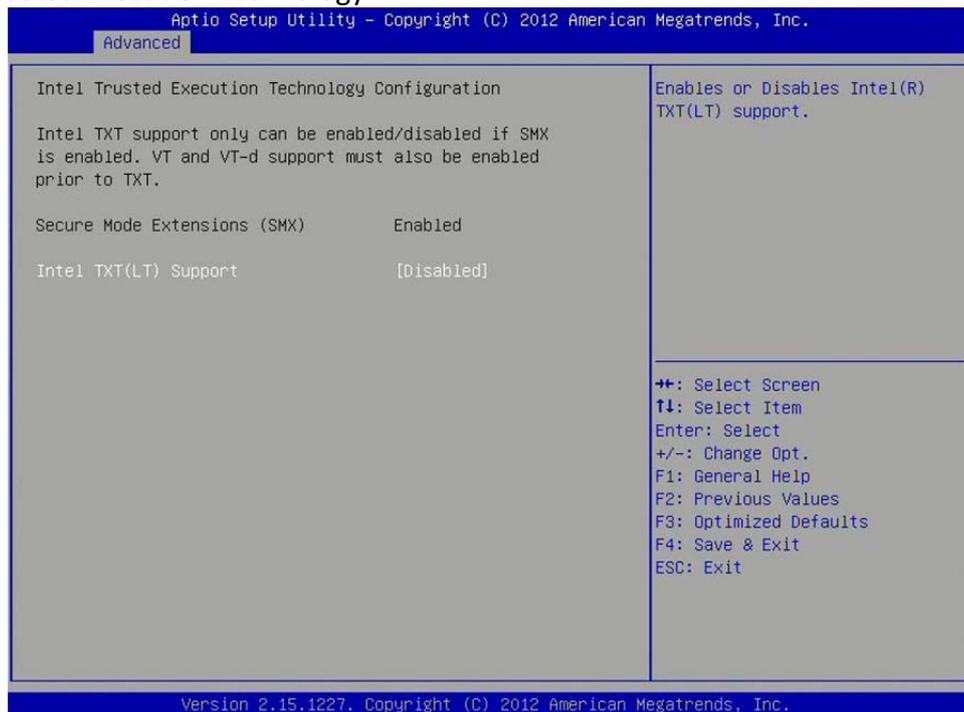

**Intel TXT(LT) Support**  
 Enables or disables Intel TXT(LT) support

### 3.4.7 PCH-FW Configuration

This section is used to configure Management Engine Technology parameters.



### 3.4.8 Intel Anti-Theft Technology Configuration

Disabling Intel AT allow user to login platform. This is strictly for testing only. This does not disable Intel AT services in ME



#### Intel Anti-Theft Technology


Enable or Disable Intel AT in BIOS for testing only

#### Intel Anti-Theft Technology Rec

Set the number of times Recovery attempted will be allowed.

### 3.4.9 AMT Configuration

This section is used to configure Active Management Technology (AMT) options.

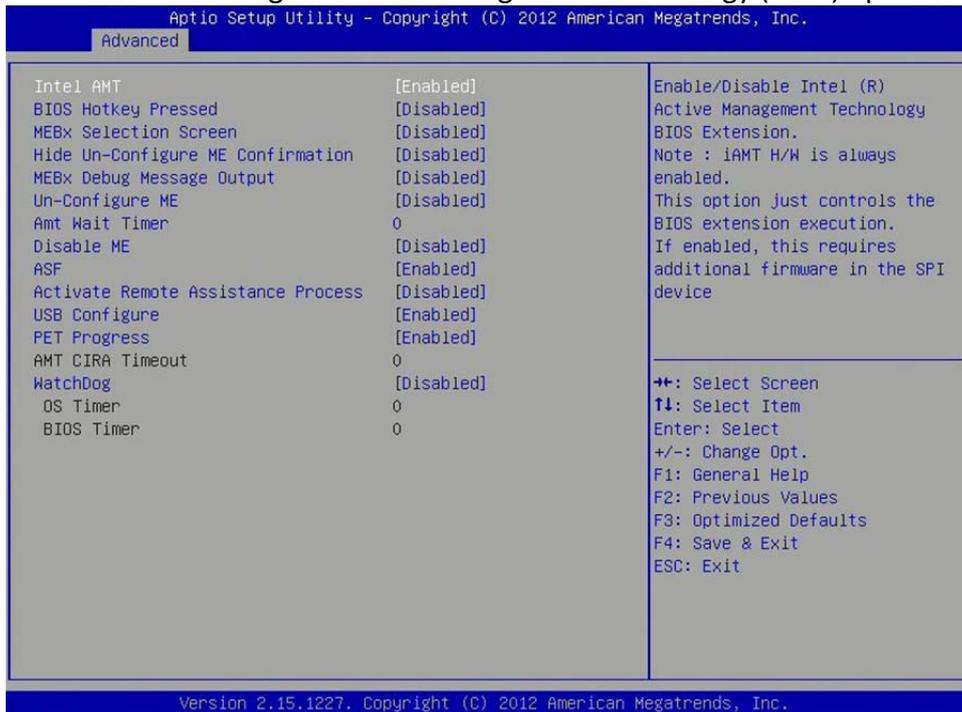

#### Intel AMT

Enable/disable Intel Active Management Technology BIOS extension.

Note: iAMT H/W is always enabled.

This option just controls the BIOS extension execution. If enabled, this requires additional firmware in the SPI device.

#### BIOS Hotkey Pressed

Enable/disable BIOS hotkey press.

#### MEBx Selection Screen

Enable/disable MEBx Selection Screen

#### Hide Un-Configure ME Confirmation

Hide Un-Configure ME without password confirmation prompt

#### MEBx Debug Message Screen

Enable MEBx debug message output

#### Un-Configure ME

Perform AMT/ME unconfigure without password operation.

#### Amt Wait Timer

Set timer to wait before sending ASF\_GET\_BOOT\_OPTIONS.

#### Disable ME

Set ME to Soft Temporary Disabled

## ASF

Enable/Disable Alert specification Format

## Activate Remote Assistance Process

Trigger CIRA boot.

## USB Configure

Enable/Disable USB configure function.

## PET Progress


User can Enable/Disable PET Events progress to receive PET events or not.

## Watchdog Timer

Enable/Disable Watchdog Timer.

### 3.4.10 USB Configuration

This section is used to configure the USB

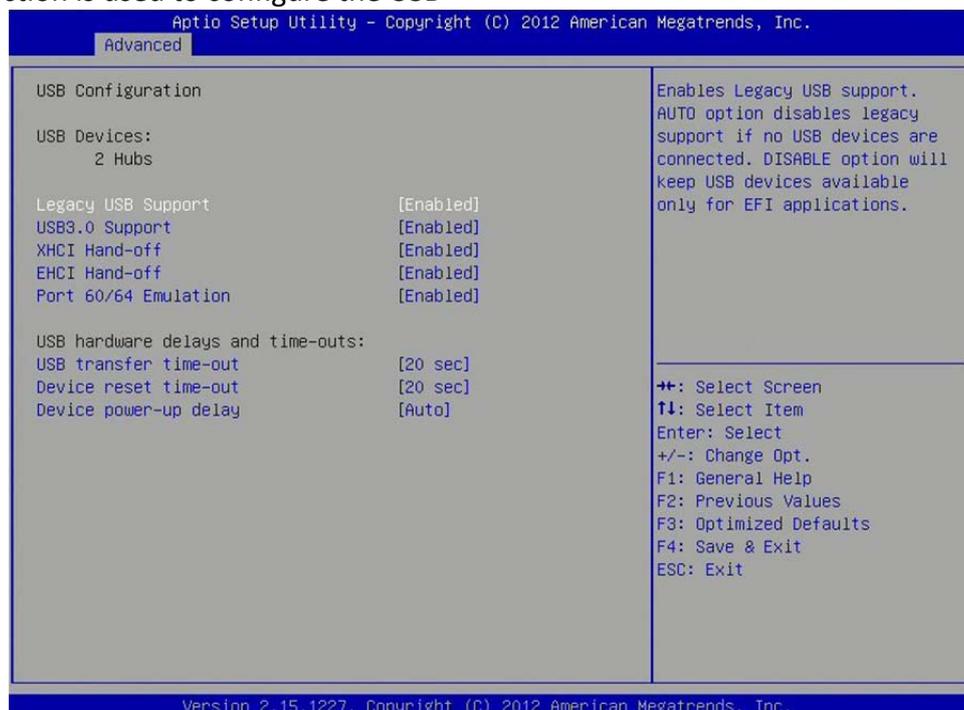

#### Legacy USB Support

Enables Legacy USB support.

AUTO option disables legacy support if no USB devices are connected.

DISABLE option will keep USB devices available only for EFI applications.

#### USB3.0 Support

Enable/Disable USB3.0 (XHCI) Controller support.

#### XHCI Hand-off

This is a workaround for OSeS without XHCI hand-off support. The XHCI ownership

change should be claimed by XHCI driver.

### **EHCI Hand-off**

This is a workaround for OSes without EHCI hand-off support. The EHCI ownership change should be claimed by EHCI driver.

### **Port 64/60 Emulation**

Enables I/O port 60h/64h emulation support. This should be enabled for the complete USB keyboard legacy support for non-USB aware OSes.

### **USB Transfer time-out**

The time-out value for Control, Bulk, and Interrupt transfers.

### **Device reset time-out**

USB mass Storage device start Unit command time-out.

### **Device power-up delay**

Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.

## **3.4.11 F81866 Super IO Configuration**

System super IO chip parameters



### **Serial Port Configuration**


Set Parameters of Serial Ports. User can Enable/Disable the serial port and Select an optimal settings for the Super IO Device.

### **Parallel Port configuration**

Set parameters of parallel port (LPT/LPTE)

### 3.4.12 F81866 H/W Monitor

This section is used to monitor hardware status such as temperature, fan speed and voltages.

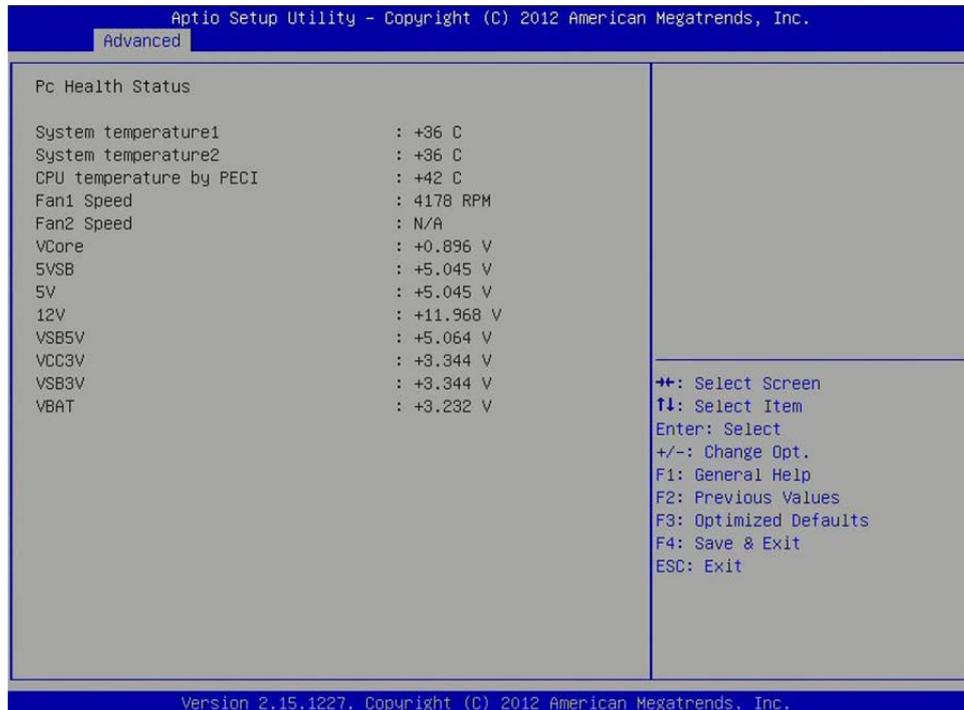

#### System Temperature

Detects and displays the current system temperature.

#### CPU Temperature


Detects and displays the current CPU temperature.

#### Fan1/2 Speed

Detects and displays the current CPU fan speed.

### 3.4.13 Serial Port Console Redirection

This screen provides information about functions for specifying the Serial Port Console Redirection configuration settings. Console redirection can be used to remotely operate system settings and the EFI console.

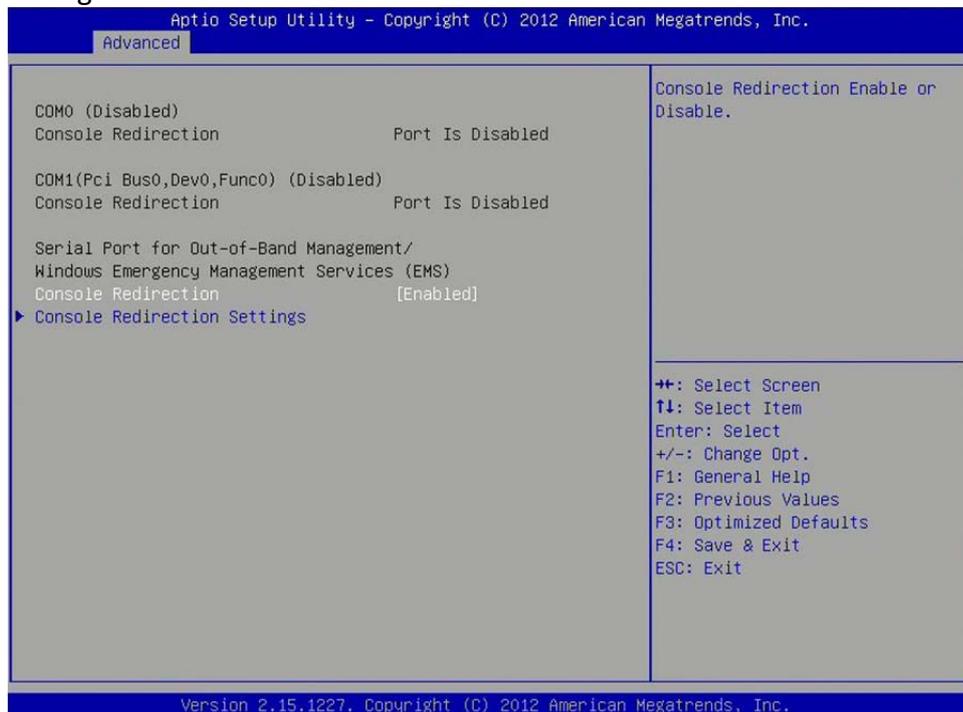

#### Console Redirection


Console Redirection Enable or Disable.

#### Console Redirection Settings

The setting specify how the host computer and the remote computer (which the user is using) will exchange data. Both computers should have the same or compatible settings.

### 3.4.14 CPU PPM Configuration

#### CPU PPM configuration parameters

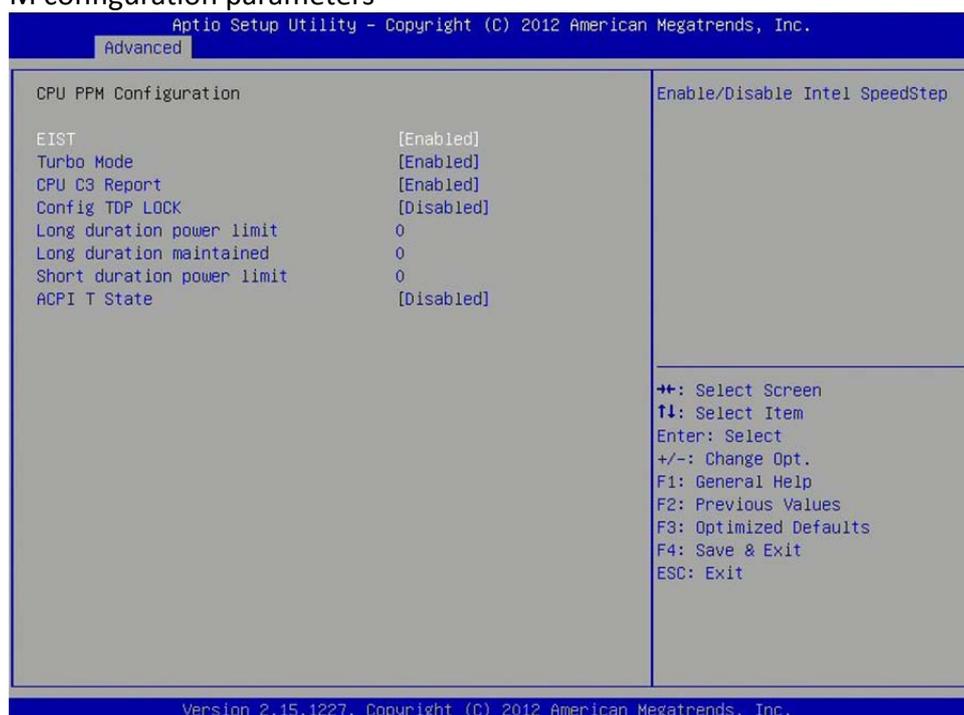

#### **EIST**

Enables or disables Intel SpeedStep.

#### **CPU C3 Report**

Enable or disable CPU C3 (ACPI C2) report to OS.

#### **Config TDP LOCK**

Lock the Config TDP control register

#### **Long duration power limit**

Long duration power limit in Watts, 0 means use factory default.

#### **Long duration maintained**

Time window which the long duration power is maintained.

#### **Short duration power limit**


Short duration power limit in Watts, 0 means use factory default.

#### **ACPI T State**

Enable or disable ACPI state support.


### 3.5 Chipset

This section gives you functions to configure the system based on the specific features of the chipset. The chipset manages bus speeds and access to system memory resources.

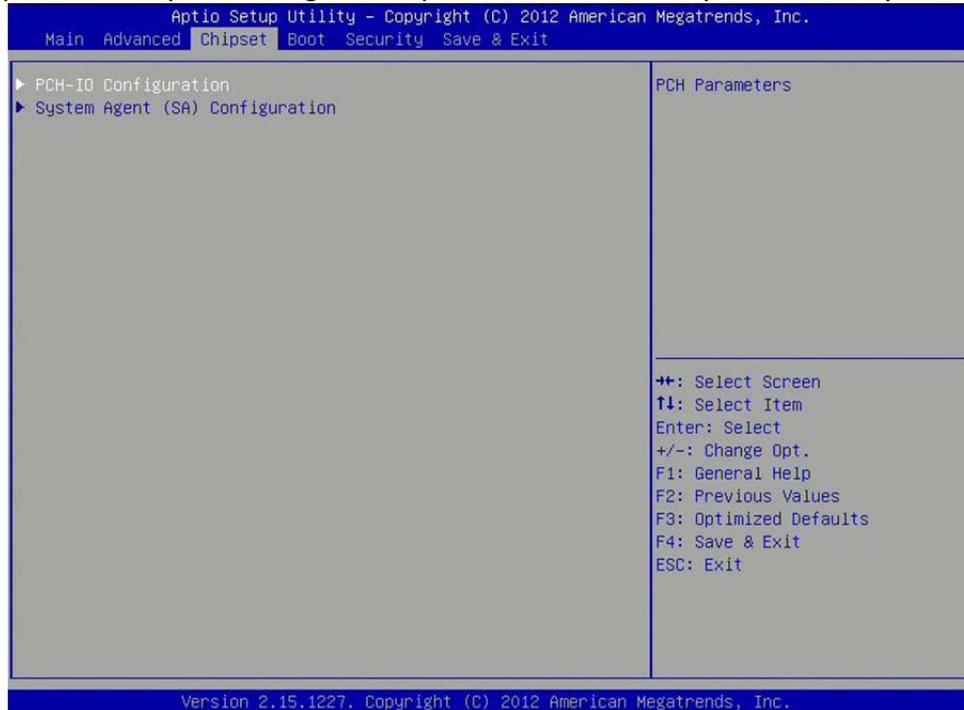

#### 3.5.1 PCH-IO Configuration

This section allows you to configure the North Bridge Chipset.

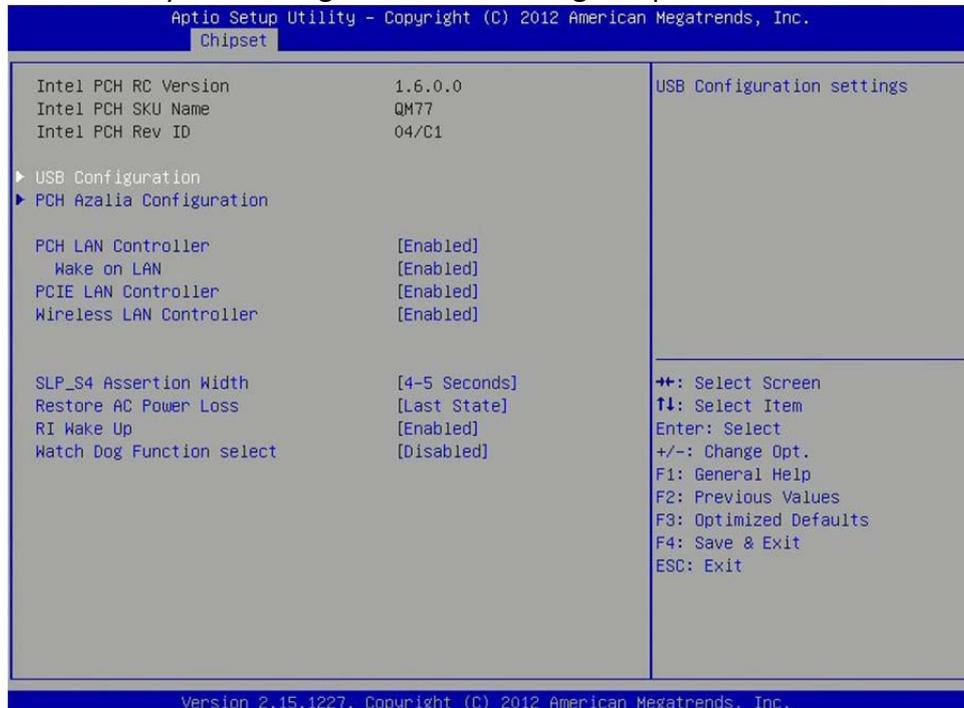

**USB Configuration**

USB configuration settings

**PCH Azalia Configuration**

PCH Azalia configuration settings

**PCH LAN Controller**

Enable or disable onboard NIC.

**Wake on LAN**

Enable or disable integrated LAN to wake the system. (The Wake On LAN cannot be disabled if ME is on at Sx state.)

**PCIE LAN Controller**

Enable or disable onboard PCIE LAN

**Wireless LAN Controller**

Enable or disable onboard MPCIE LAN-Wireless LAN.

**SLP\_S4 Assertion Width**

Select a minimum assertion width of the SLP\_S4# signal.

**Restore AC Power Loss**

Select AC power state when power is re-applied after a power failure.

**RI Wake Up**

RI wake up function select.

**Watch Dog Function select**

Watch Dog function enabled or disabled.

### 3.5.1.1 USB Configuration



#### **XHCI Pre-Boot Driver**

Enable or disable XHCI Pre-Boot driver support.

#### **XHCI Mode**

Mode of operation of XHCI controller

#### **HS Port #1/2/3/4 Switchable**

Allows for HS port switching between xHCI and EHCI. If disabled, port is routed to EHCI. If HS port is routed to xHCI, the corresponding SS port is enabled.

#### **xHCI Streams**

Enable or disable xHCI Maximum Primary Stream Array Size.


#### **EHCI1/2**

Control the USAB EHCI (USB 2.0) functions. One EHCI controller must always be enabled.

#### **USB Ports Per-Port Disable Control**

Control each of the USB ports (0~13) disabling.

### 3.5.1.2 PCH Azalia Configuration

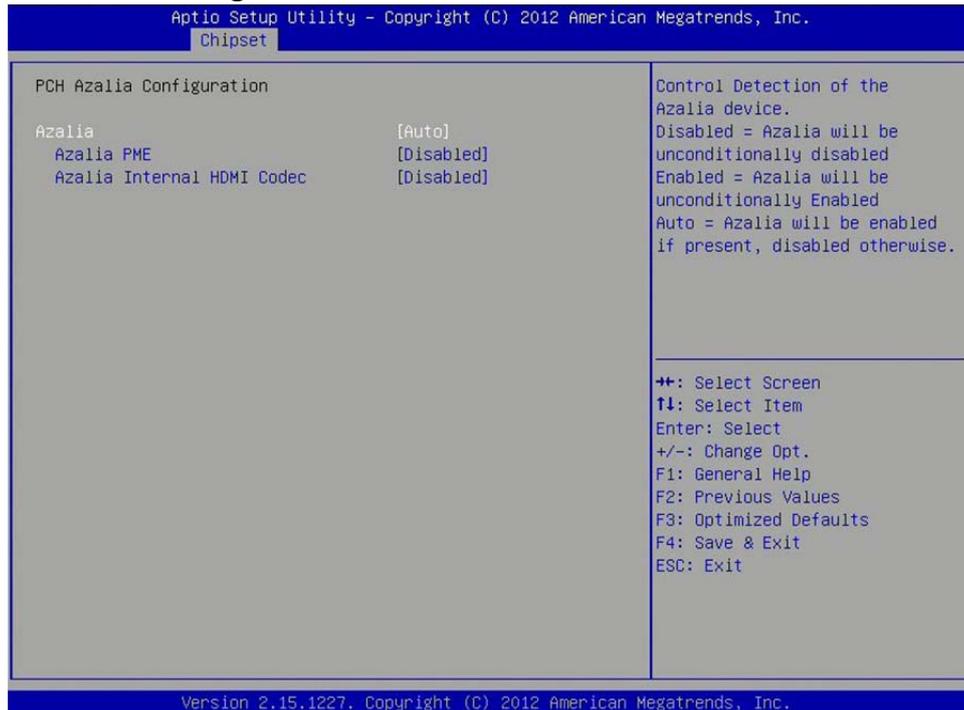

#### **Azalia**

Control Detection of the Azalia device.

Disabled=Azalia will unconditionally disabled.

Enabled=Azalia will be unconditionally enabled.

Auto=Azalia will enabled if present, disabled otherwise.

#### **Azalia PME**

Enable or disable Power Management capability of audio controller.

#### **Azalia Internal HDMI codec**

Enable or disable internal HDMI codec for Azalia.

### 3.5.2 System Agent (SA) Configuration

This section is used to configure the System Agent (SA) configuration.



#### VT-d

Check to enable VT-d function on MCH.

Enable NB CRID

Enable or disable NB CRID WorkAround.

#### C-State Pre-Wake

Controls C-State Pre-Wake feature for ARAT, in SSKPD[57].


#### Graphics Configuration

Configure graphics settings

#### Memory Configuration

Memory configuration parameters

### 3.5.2.1 Graphics Configuration

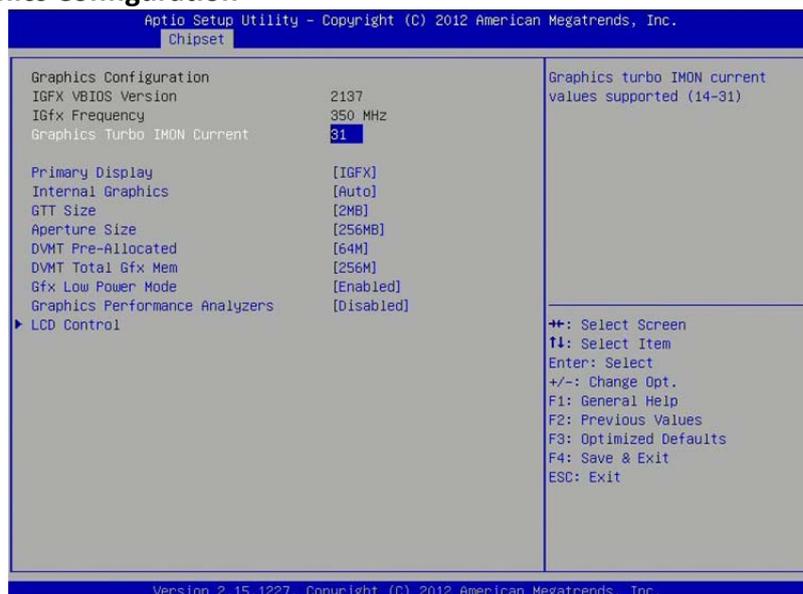

#### Primary Display

Select which of IGFX/PEG/PCI graphics device should be primary display or select SG for switchable Gfx.

#### Internal Graphics

Keep IGD enabled based on the setup options.

#### DVMT Pre-Allocated

Select DVMT 5.0 Pre-Allocated (Fixed) graphics memory size used by the internal graphics device.

#### DVMT Total Gfx Mem

Select DVMT 5.0 total graphics memory size used by the internal graphics device.

#### Gfx Low Power Mode

This option is applicable for SFF only.

#### Graphics Performance Analyzers

Enable or disable Intel graphics performance analyzers counters.

### 3.5.2.2 Memory Configuration

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.

Chipset

Memory Information		▲ Select DIMM timing profile that should be used.
Memory RC Version	1.6.0.0	
Memory Frequency	1333 Mhz	
Total Memory	2048 MB (DDR3)	
DIMM#0	2048 MB (DDR3)	
DIMM#1	Not Present	
CAS Latency (tCL)	9	
Minimum delay time		
CAS to RAS (trCDmin)	9	
Row Precharge (trPmin)	9	
Active to Precharge (trASmin)	24	
XMP Profile 1	Not Supported	
XMP Profile 2	Not Supported	
DIMM profile		[Default DIMM profile]
Memory Frequency Limiter	[Auto]	
Max TOLUD	[Dynamic]	
NMode Support	[Auto]	
Memory Scrambler	[Enabled]	
MRC Fast Boot	[Enabled]	
Force Cold Reset	[Enabled]	
DIMM Exit Mode	[Fast Exit]	
Power Down Mode	[PPD]	
Scrambler Seed Generation Off	[Disabled]	
		++: Select Screen ↑: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit

---

Version 2.15.1227. Copyright (C) 2012 American Megatrends, Inc.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.


Chipset

Total Memory		2048 MB (DDR3)	▲ Enable or disable dimms on Channel B.
DIMM#0	2048 MB (DDR3)		
DIMM#1	Not Present		
CAS Latency (tCL)	9		
Minimum delay time			
CAS to RAS (trCDmin)	9		
Row Precharge (trPmin)	9		
Active to Precharge (trASmin)	24		
XMP Profile 1	Not Supported		
XMP Profile 2	Not Supported		
DIMM profile		[Default DIMM profile]	
Memory Frequency Limiter	[Auto]		
Max TOLUD	[Dynamic]		
NMode Support	[Auto]		
Memory Scrambler	[Enabled]		
MRC Fast Boot	[Enabled]		
Force Cold Reset	[Enabled]		
DIMM Exit Mode	[Fast Exit]		
Power Down Mode	[PPD]		
Scrambler Seed Generation Off	[Disabled]		
Memory Remap	[Enabled]		
Memory Alias Check	[Disabled]		
Channel A DIMM Control	[Enable Both DIMMS]		
Channel B DIMM Control	[Enable Both DIMMS]		
			++: Select Screen ↑: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit

Version 2.15.1227. Copyright (C) 2012 American Megatrends, Inc.

### 3.6 Boot Setting

This section is used to configure the boot features.

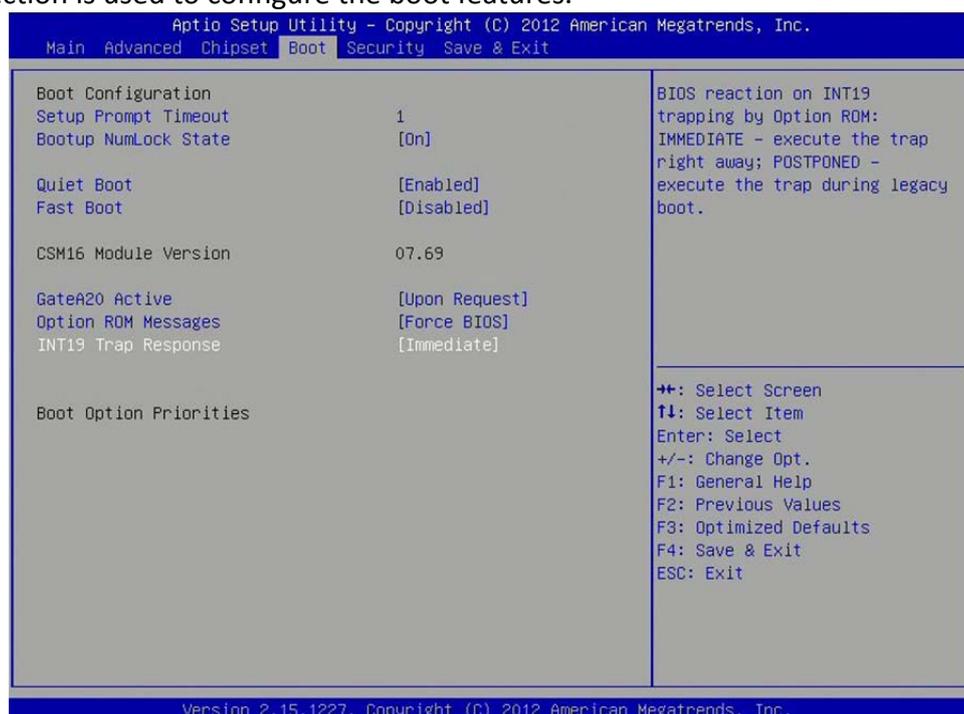

#### Setup Prompt Timeout

Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.

#### Bootup NumLock State

Select the keyboard NumLock state.

#### Quiet Boot

Enables or Disables Quiet Boot option.

#### Fast Boot

Enables or Disables boot with initialization of a minimal set of devices required to launch active boot option. Has no effect for BBS boot options.

#### GateA20 Active

UPON REQUEST – GA20 can be disabled using BIOS services.

ALWAYS – do not allow disabling GA20; this option is useful when any RT code is executed above 1MB.

#### Option ROM Messages

Set display mode for Option ROM.

#### INT19 Trap Response


BIOS reaction on INT19 trapping by Option ROM: IMMEDIATE – execute the trap right away; POSTPONED – execute the trap during legacy boot.

## Boot Option Priorities

Sets the system boot order.

## 3.7 Security

Use the Security Menu to establish system passwords

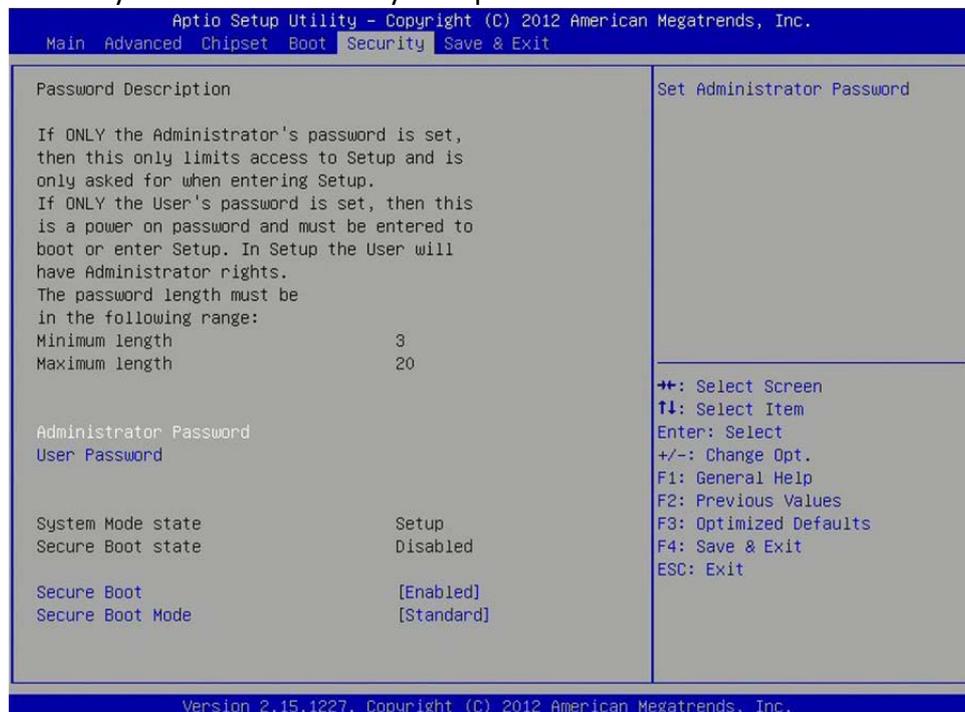

### Administrator Password

Set administrator password.

### User Password

Set User Password.

### Secure Boot


Secure boot flow control. Secure boot is possible only if system runs in user mode.

### Secure Boot Mode

Secure boot mode selector. 'Standard' – fixed secure boot policy, 'custom' – changeable image execution policy and secure boot key databases.

### 3.8 Save and exit

This screen provides functions for handling changes made to the BIOS settings and the exiting of the Setup program.

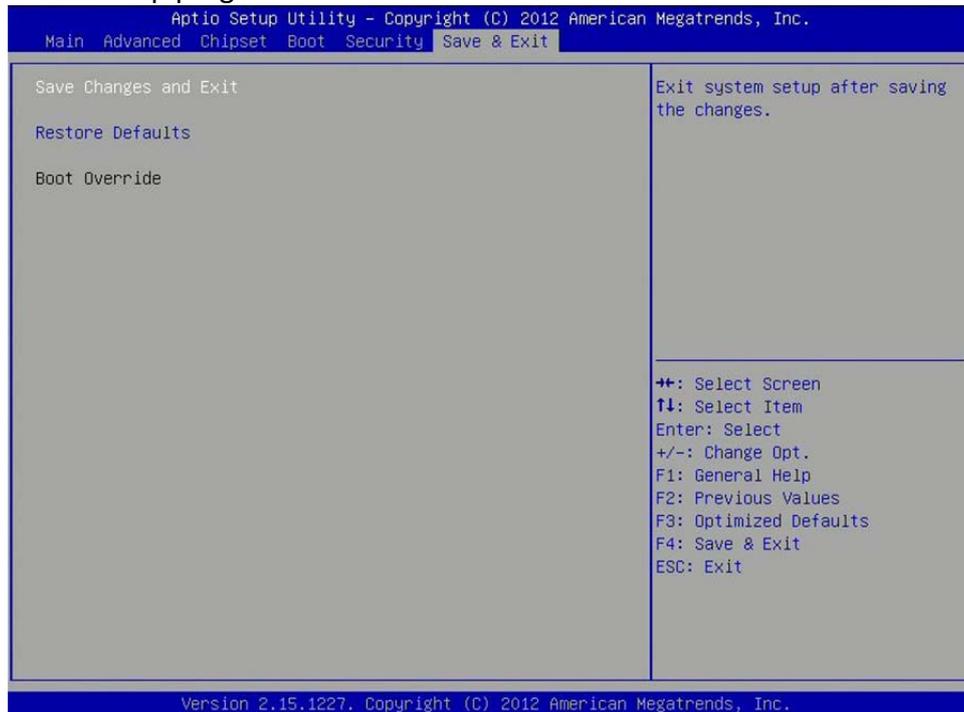

#### Save Changes and Exit

Exit system setup after saving the changes.

#### Restore Defaults

Restore or Load Defaults values for all the setup options.